SWITCH TYPE	Micro Switches	MODEL NO.	VMS15-02N-**
1. Functional spec.			
1.1 Rated Voltage	125/250VAC	1.6 Free Position	20.75±0.8mm
1.2 Rated Current	15A	1.7 Operating Position	18.25±0.8mm
1.3 Contact Resistance	≤100mΩ (Initial value)	1.8 Position Travel	
1.4 Operating Force	(* *)gf	1.9 Return Force	
1.5 Bounce Time		1.10	
2.Reliable Rating			
2.1 Mechanical Life	100,000 CYCLES	2.5 Soldering Technic	Hand Soldering
2.2 Electrical Life	10,000 CYCLES	2.6 Operating Temper	-25° C - +85° C
2.3 Insulation Resistance	≥100MΩ DC500V (Initial value)	2.7 Ambient Humidity Used	<85%RH
2.4 Withstand Voltage	AC1500V 1 minute (Initial value)	2.8	

3. Dimension Drawing

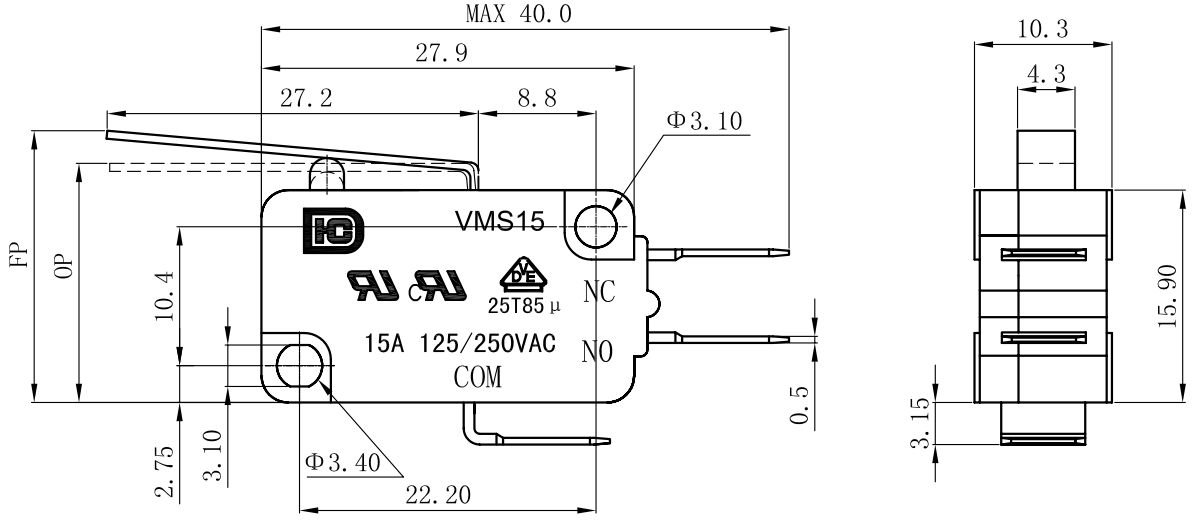

SCHEMATIC



Revision	Description			Date	Revisor
Drawing No.			C/0	Tolerance	±0.2
Drawing Model.	SPECIFICATION OF STANDARD TYPE			Unit	mm
Prepared		Reviewed		Approved		Effective date	