

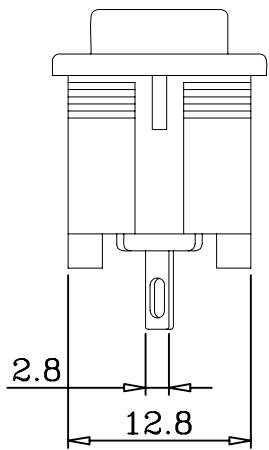
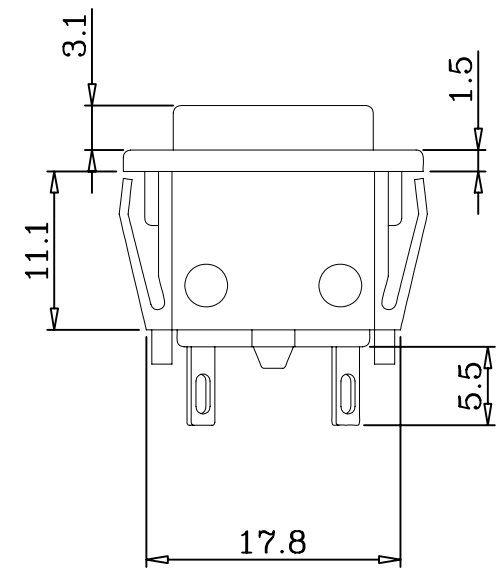


SPECIFICATIONS

- 1.Circuit: SPST (ON)–OFF
- 2.Rating: 10A 125VAC/6A 250VAC   
- 3.Contact R: 50m ohm (Max.)
- 4.Insulation R: DC 500V 100M ohm (min.)
- 5.Dielectric Strength: AC 1500V 1Minute

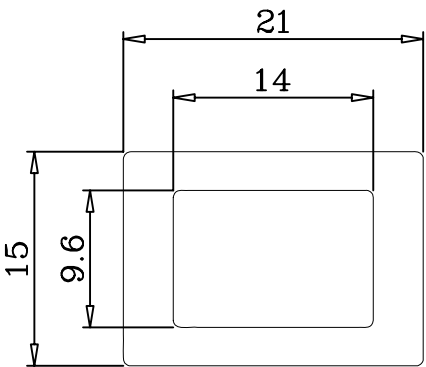


Mount Hole

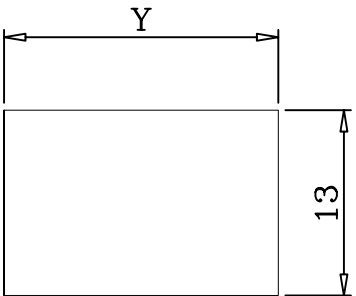

Panel Thickness	Y
0.75~1.25	19.2
1.25~2.0	19.4
2.0~3.0	19.8

Circuit Structure



												</	