

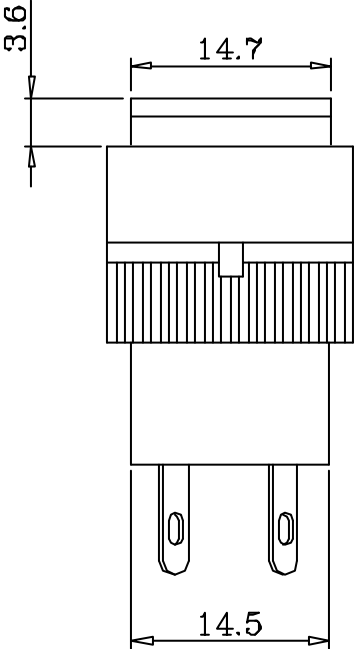
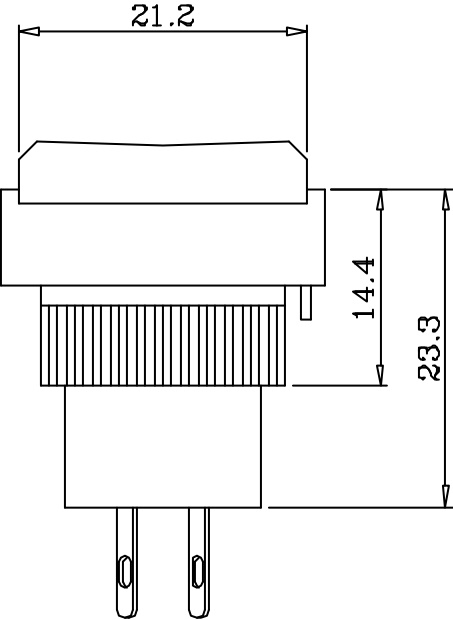


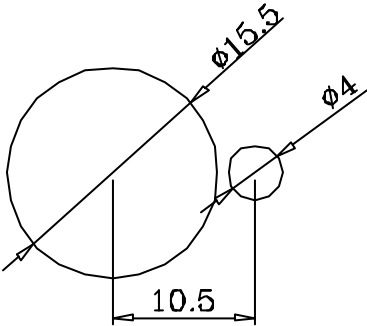

General Specifications

- 1.Circuit: A:(ON)-OFF B:ON-OFF
- 2.Rating: 3A 125VAC
- 3.Lamp Volt: 6V,9V,12V,24V,110V,220V
- 4.Contact R.(max): 1A 5VDC 30mΩ
- 5.Insulation R.(min): DC 500V 100MΩ
- 6.Withstand VOL: AC 500V 1Minute
- 7.Operating Force: 250±50g
- 8.Life Cycle(max): 40,000 Cycles

General Specifications

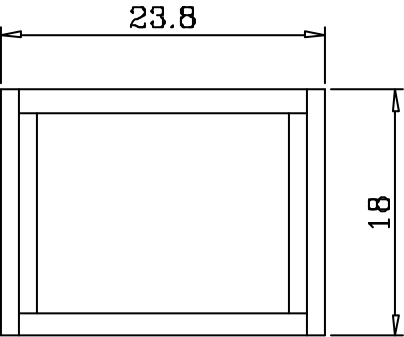