



TD-29XU

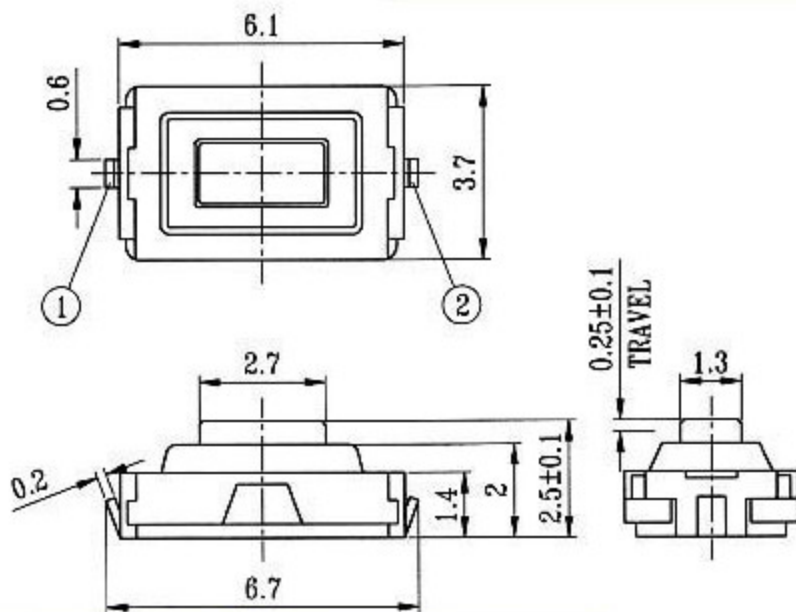

CIRCUIT DIAGRAM



SPECIFICATIONS

1. RATING : DC 12V 50mA
2. TRAVEL : 0.25 ± 0.1 mm
3. CONTACT RESISTANCE 100 mΩ MAX
4. OPERATING FORCE: 190gf ± 50gf
5. TAPE & REEL OPTION : Yes