

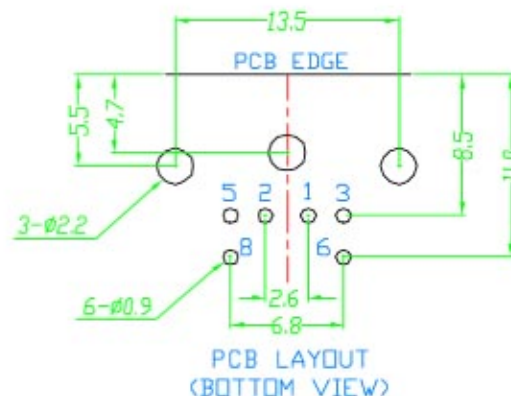
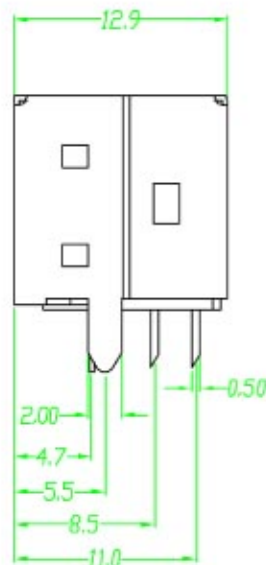


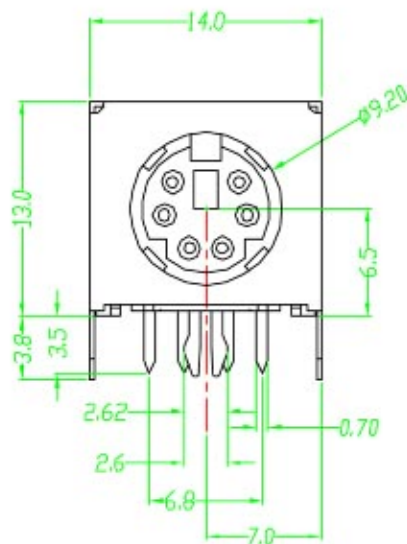

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 100M Ohm Min.AT 500V DC


Rated Voltage And Current: DC12V.2A Max;AC 100V.1A Max

Dielectric Withstanding Voltage: 250V AC For 1 Minute

Durability (Life Test): 100 Cycles

Insertion Force: 4.0KG Maximum.

Extraction Force: 0.9KG Minimum.



NO.	NAME	MATERIAL	FINISH	Q'TY
1	HOUSING	PBT G.F.	PURPLE;2715C	1
2	CONTACT	PHOS. BRONZE T:0.2	Gold(1~3u'') Ni(40~60u'') IN(120u'') (100% pure Tin of lead free plating)	6
3	SHIELD	BRASS T:0.3	TIN PLATED Sn(120~200u'')	1
4	BOTTOM COVER	PBT G.F.	PURPLE;2715C	1