

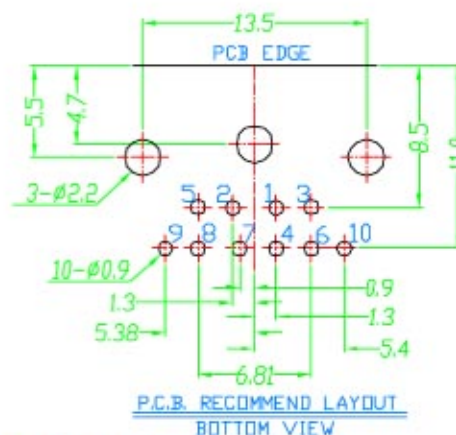

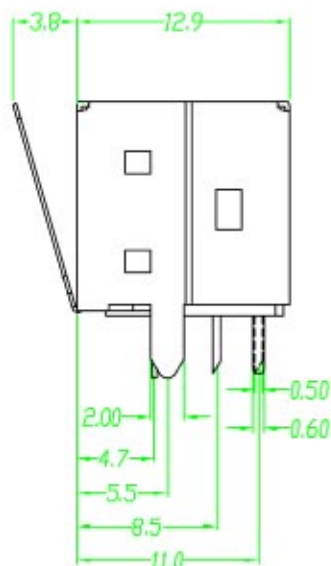


REV	ZONE	REVISION	DATE

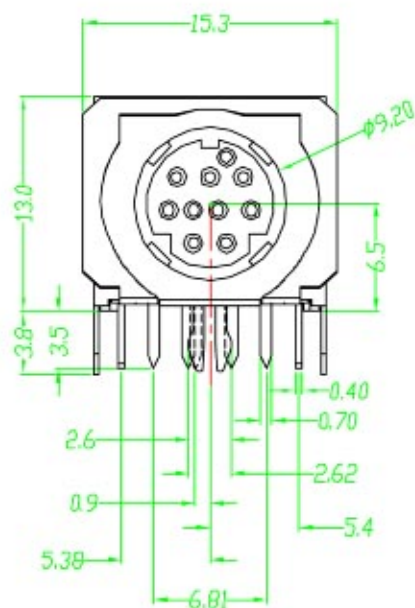

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 100M Ohm Min.AT 500V DC

Rated Voltage And Current: DC12V,2A Max;AC 100V,1A Max

Dielectric Withstanding Voltage: 250V AC For 1 Minute

Durability (Life Test): 100 Cycles

Insertion Force: 4.0KG Maximum

Extraction Force: 0.9KG Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY
1	HOUSING	PBT G.F.	BLACK	1
2	CONTACT	PHOS. BRONZE T:0.2	Gold(1~3u"); ND:40~60u"); TIN:120u" (100% pure Sn of lead free plating)	8
3	SHIELD	BRASS T:0.3	TIN PLATED Sn:120~200u"	1
4	BOTTOM COVER	PBT G.F.	BLACK	1
5	HARPOON	BRASS T:0.4	Gold(1~3u"); ND:40~60u"); IN:120u" (100% pure Sn of lead free plating)	2
6	SPRING SHIELD	STAINLESS T:0.2		1