

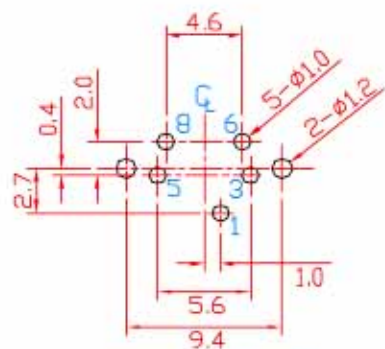
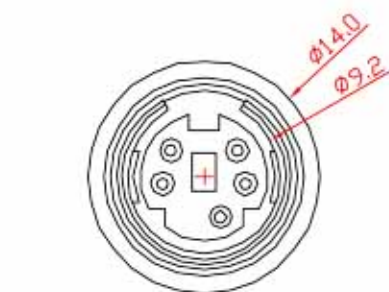



— 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD. —



COMPONENT SIDE
(PCB LAYOUT)

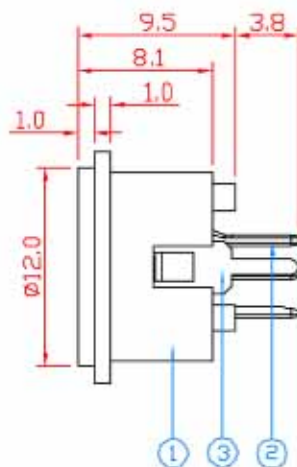

ARRANGEMENT
OF CONTACTS

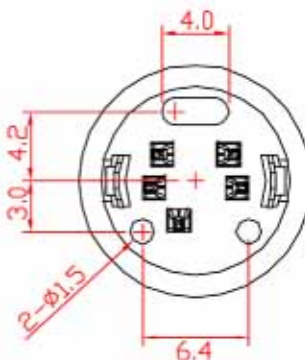

REV	ZONE	REVISION	DATE

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 100M Ohm Min; AT 500V DC .

Rated Voltage And Current: DC12V.2A Max; AC 100V.1A Max .

Dielectric Withstanding Voltage: 250V AC For 1 Minute.

Durability (Life Test): 100 Cycles .

Insertion Force: 4.0KG Maximum.

Extraction Force: 0.9KG Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	CONTACT TERM.	PHOS. BRONZE T0.2	SILVER PLATED	5	SILVER20~30u'
3	GROUND TERM.	BRASS T0.3	TIN PLATED	1	TIN120~200u'