

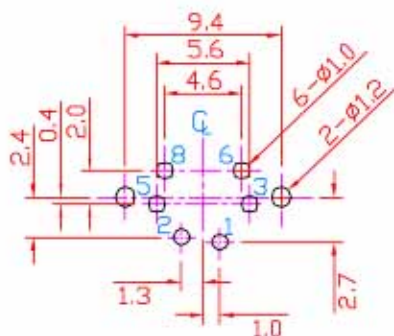
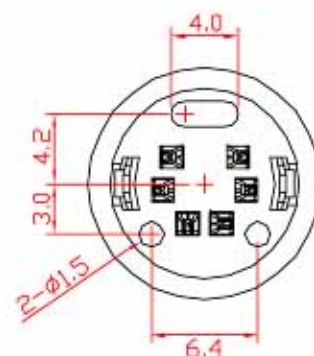
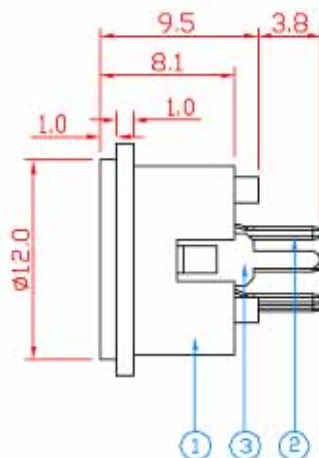


REV	ZONE	REVISION	DATE



COMPONENT SIDE
(PCB LAYOUT)



Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 100M Ohm Min; AT 500V DC

Rated Voltage And Current: DC12V.2A Max; AC 100V.1A Max

Dielectric Withstanding Voltage: 250V AC For 1 Minute.

Durability (Life Test): 100 Cycles

Insertion Force: 4.0KG Maximum.

Extraction Force: 0.9KG Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	CONTACT TERM.	PHOS. BRONZE T:0.2	SILVER PLATED	6	SILVER:20-30u"
3	GROUND TERM.	BRASS T:0.3	TIN PLATED	1	TIN:120-200u"