



# 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD.

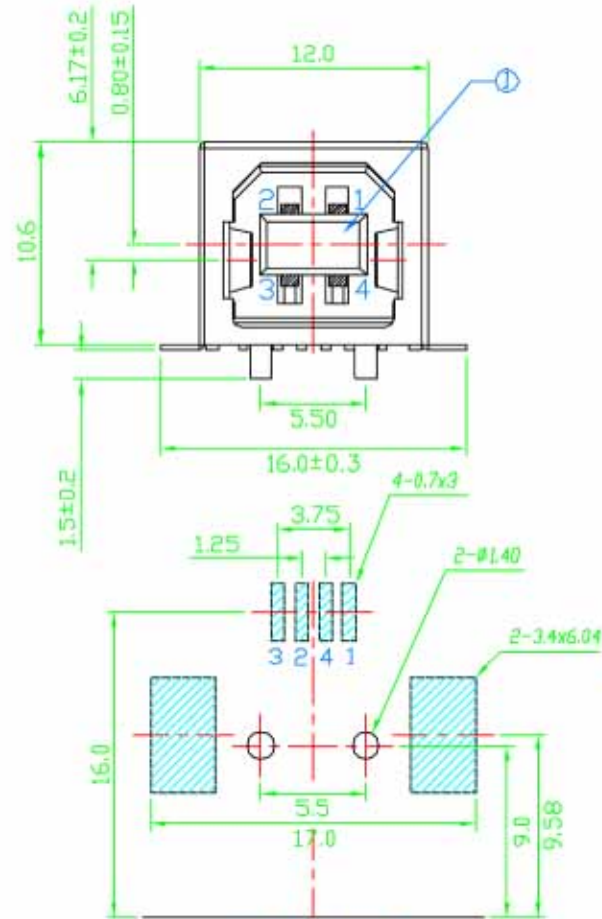

PCB EDGE  
PCB LAYOUT  
(COMPONENT SIDE)

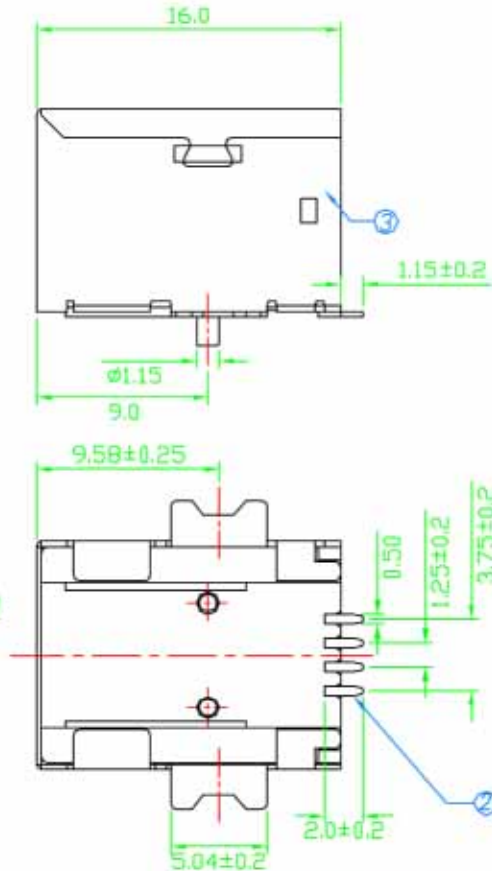

| REV | ZONE | REVISION | DATE |
|-----|------|----------|------|
|     |      |          |      |
|     |      |          |      |

## Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage:

750V AC (rms) for 1 Minute(Rev. 1.1)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

| NO. | NAME     | MATERIAL            | FINISH          | Q'TY | REMARK                                                                    |
|-----|----------|---------------------|-----------------|------|---------------------------------------------------------------------------|
| 1   | HOUSING  | NYLON PA9T G.F.     | WHITE           | 1    |                                                                           |
| 2   | TERMINAL | PHOS. BRONZE T:0.25 | GOLD/TIN PLATED | 4    | Gold:1-3u", NI:40-60u", TIN:120u"<br>(100% pure Tin of lead free plating) |
| 3   | SHELL    | BRASS T:0.2         | NICKEL PLATED   | 1    | NI:50u" MINIMUM                                                           |