
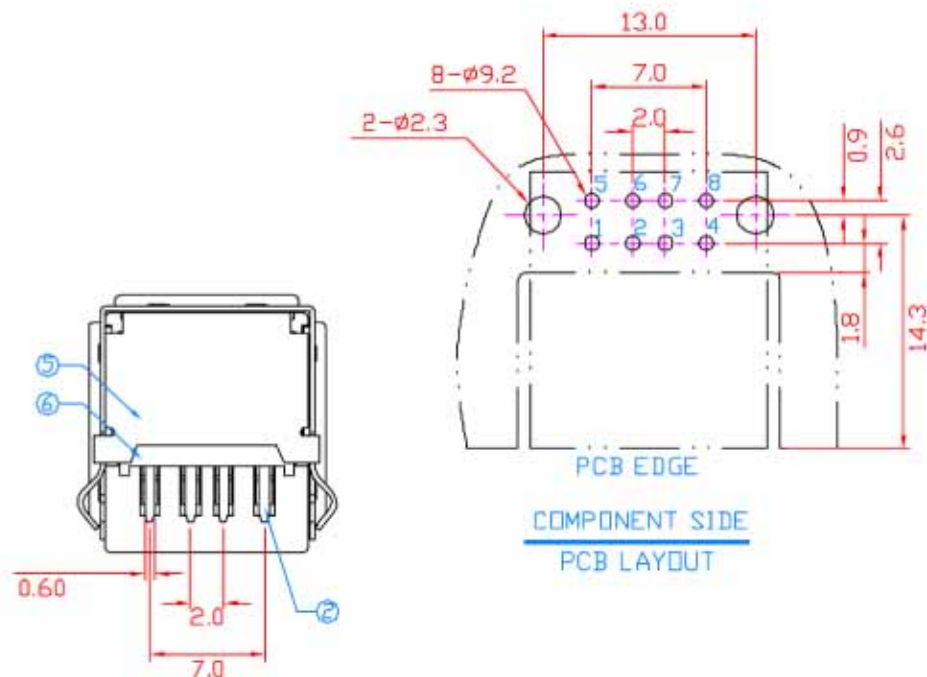


— 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD. —

REV	ZONE	REVISION	DATE

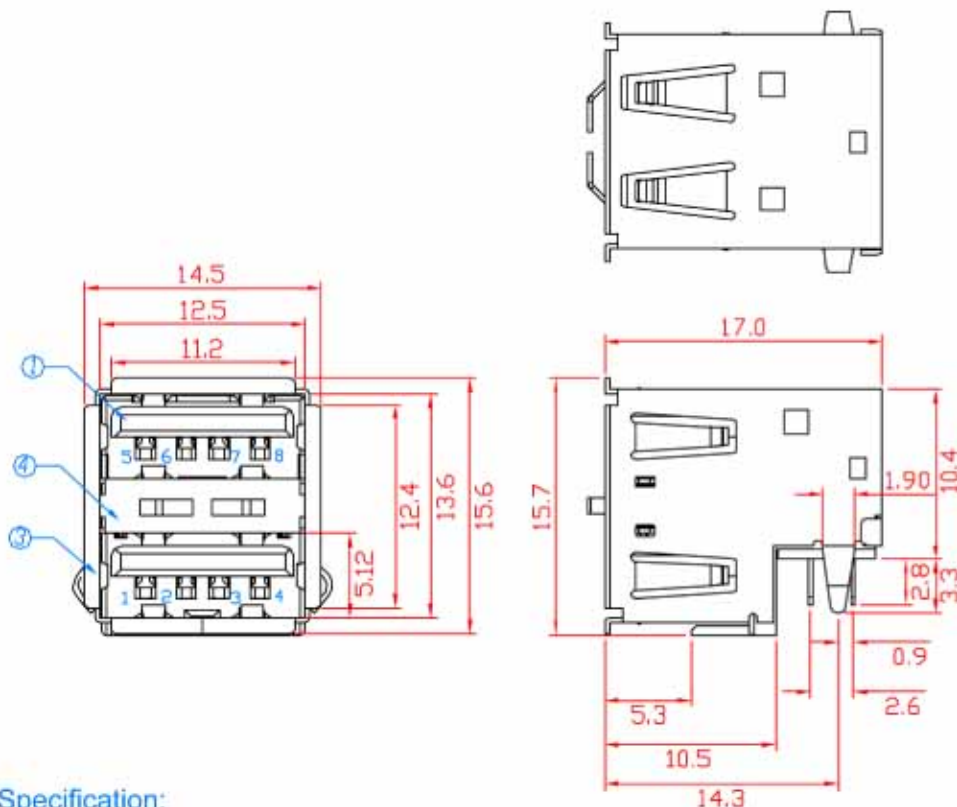

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage: 750V AC (rms) for 1 Minute(Rev. 1.1).

Durability (Life Test): 1500 Cycles.

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	WHITE	1	
2	PIN TERM.	PHOS. BRONZE, T=0.25	GOLD-TIN PLATED	8	Gold:1-3u", NI:40~60u", TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS, T=0.3	NICKEL PLATED	1	NI:80~120u"
4	SPRING CLIP	BRASS, T=0.3	NICKEL PLATED	1	NI:80~120u"
5	REAR SHELL	SPCC, T=0.3	NICKEL PLATED	1	NI:80~120u"
6	BOTTOM VIEW	PBT G.F.	WHITE	1	