
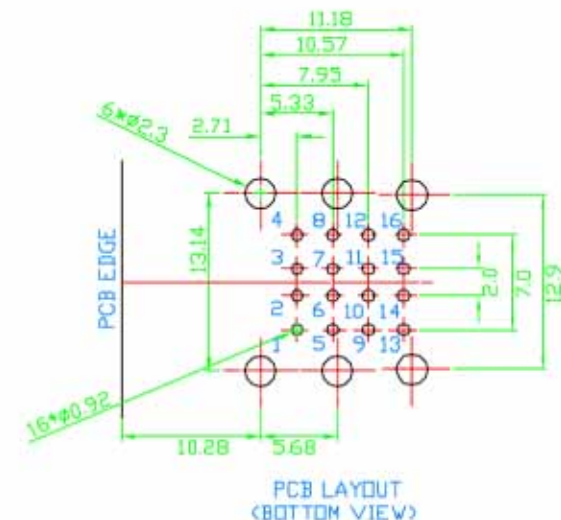


— 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD. —

REV	ZONE	REVISION	DATE

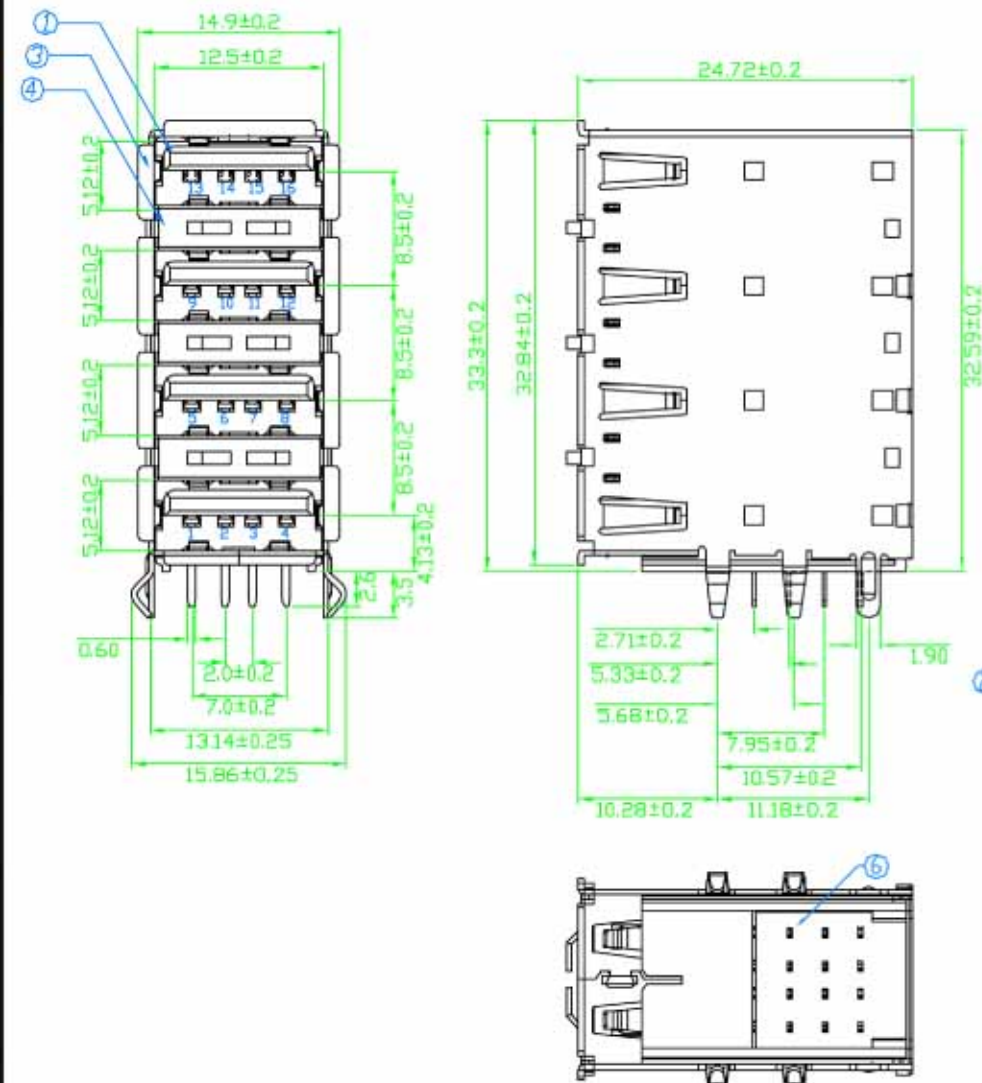

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage: 750V AC (rms) for 1 Minute(Rev. 1.1)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	PIN TERM.	PHOS. BRONZE T0.25	GOLD-TIN PLATED	16	Gold-3u", Ni40-60u", TIN120u" 100% pure Tin of lead free plating
3	SHELL	BRASS, T0.4	TIN PLATED	1	TIN120~200u"
4	SPRING CLIP	BRASS, T0.3	TIN PLATED	1	TIN120~200u"
5	REAR SHELL	SPCC, T0.3	NICKEL PLATED	1	Ni180~120u"
6	BOTTOM COVER	PBT G.F.	BLACK	1	