



# — 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD. —

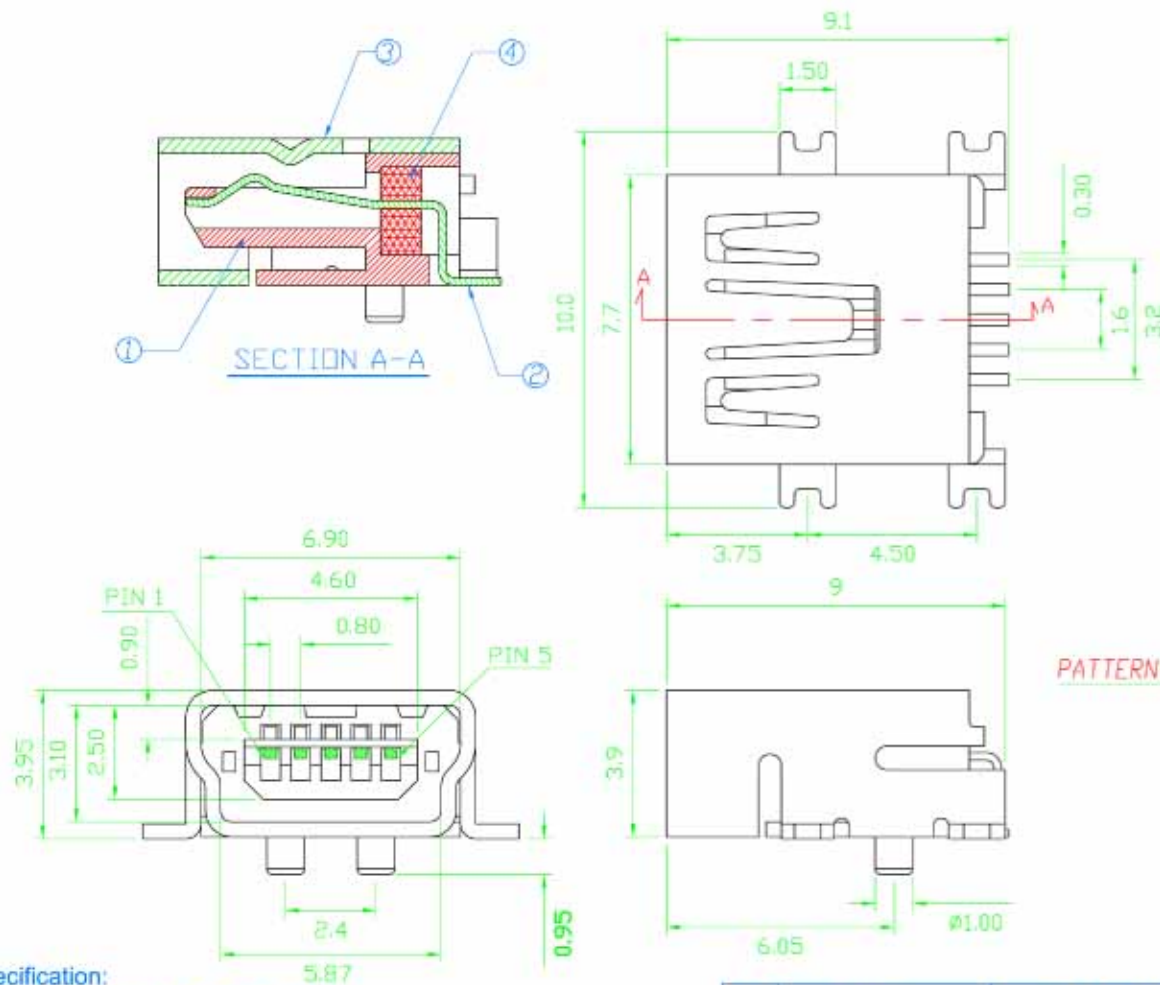

| REV | ZONE | REVISION | DATE |
|-----|------|----------|------|
|     |      |          |      |
|     |      |          |      |

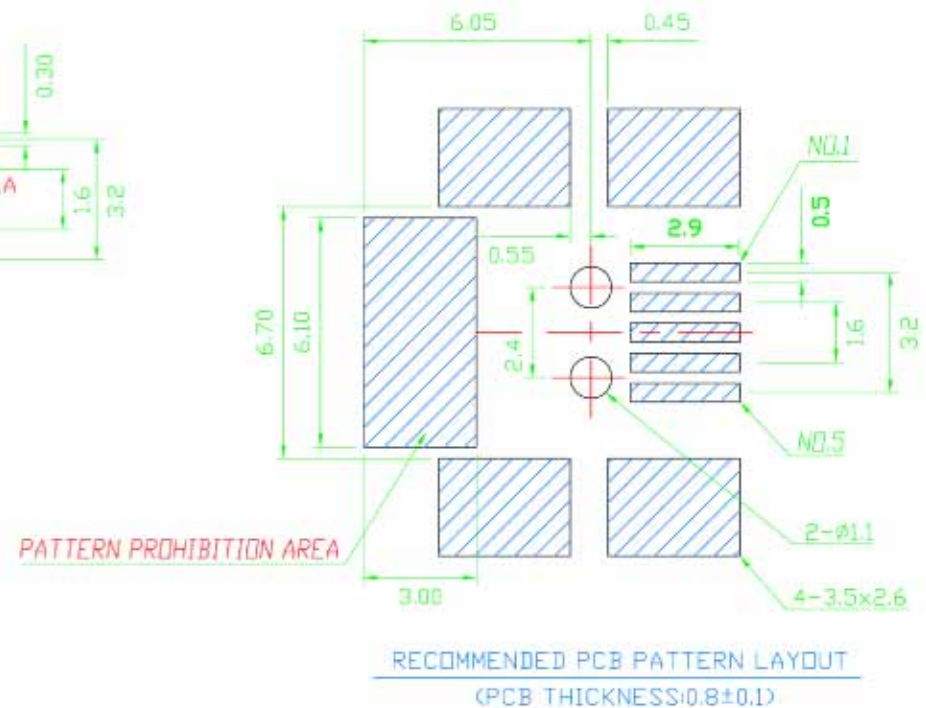

Specification:  
 Contact Resistance: 50m Ohm. Max.  
 Insulation Resistance: 100M Ohm Min. At 500VDC.  
 Rated Voltage And Current: 1A At 30VAC Minimum.  
 Dielectric Withstanding Voltage: 100V AC for 1 Minute  
 Durability (Life Test): 1500 Cycles  
 Insertion Force: 35 Newton Maximum.  
 Extraction Force: 7 Newton Minimum.

| NO. | NAME          | MATERIAL       | FINISH          | Q'TY | REMARK                                                                   |
|-----|---------------|----------------|-----------------|------|--------------------------------------------------------------------------|
| 1   | HOUSING       | NYLON PA9T G.F | BLACK           | 1    |                                                                          |
| 2   | PIN TERM.     | PBS T:0.2      | GOLD/TIN PLATED | 5    | Gold:30u", NI:40~60u", TIN:120u"<br>(100% pure Tin of lead free plating) |
| 3   | SHELL         | BRASS T:0.4    | NICKEL PLATED   | 1    | NI:50u" MINIMUM.                                                         |
| 4   | CENTER PASTER | NYLON PA9T G.F | BLACK           | 1    |                                                                          |