
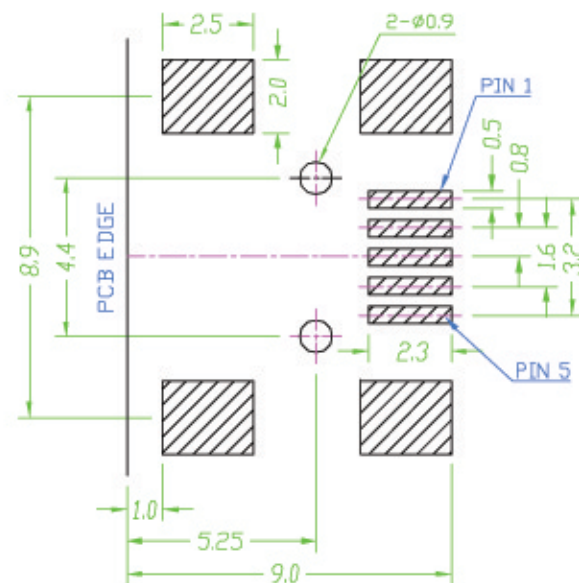
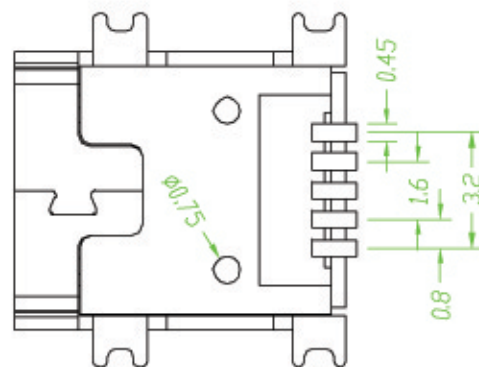
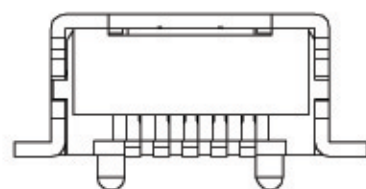
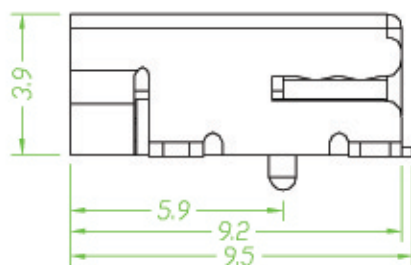
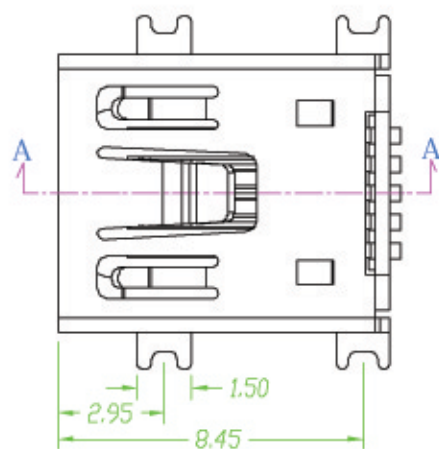


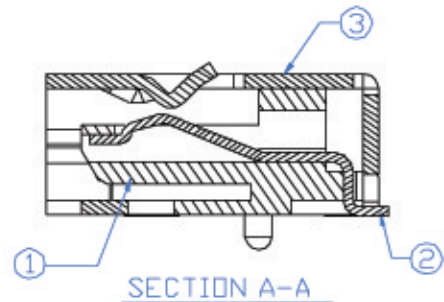

Specification:
 Contact Resistance: 50m Ohm , Max.
 Insulation Resistance: 100M Ohm Min. At 500VDC.
 Rated Voltage And Current: 1A At 30VAC Minimum.
 Dielectric Withstanding Voltage: 100V AC for 1 Minute
 Durability (Life Test): 1500 Cycles
 Insertion Force: 35 Newton Maximum.
 Extraction Force: 7 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T G.F	BLACK	1	
2	PIN TERM.	PBS T:0.25	GOLD/TIN PLATED	5	Gold: 30u" Ni: 40~60u" TIN: 120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.4	NICKEL PLATED	1	Ni: 80~120u"