




— 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD. —

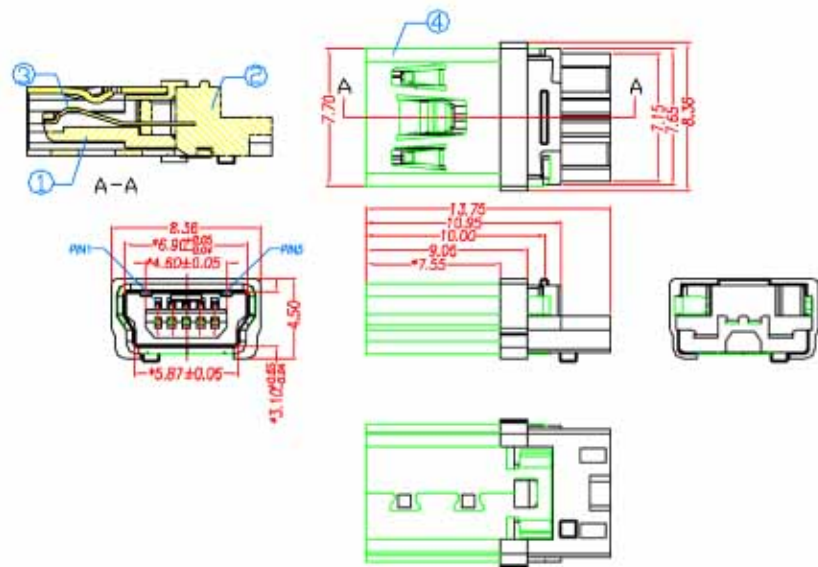

⑥

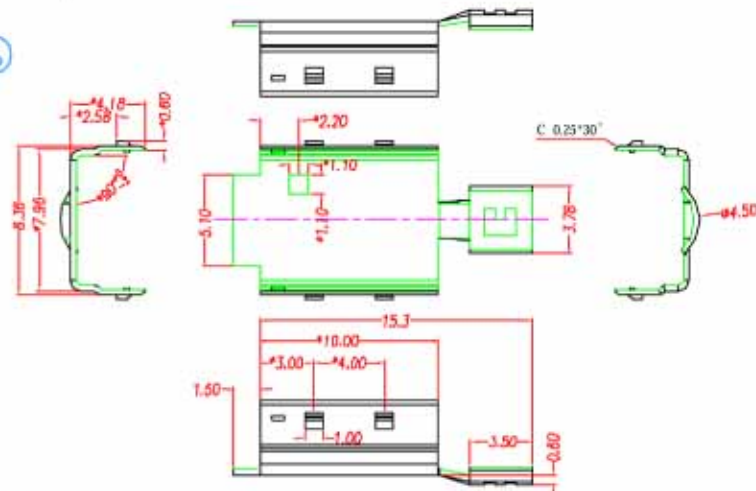

⑤

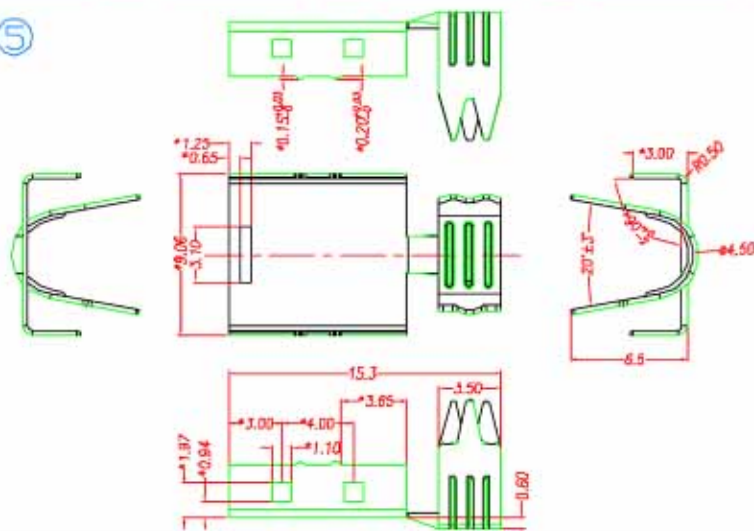

Specification:

Contact Resistance: 50m Ohm . Max.

Insulation Resistance: 100M Ohm Min. At 500VDC.

Rated Voltage And Current: 1A At 30VAC Minimum.

Dielectric Withstanding Voltage: 100V AC for 1 Minute

Durability (Life Test): 500 0 Cycles

First Insertion Force: 35 Newton Maximum.

First Extraction Force: 7 Newton Minimum.

3 Newton Minimum After 5000 Cycles.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	LCP+GF30%	BLACK	1	
2	COVER	LCP+GF30%	BLACK	1	
3	TERMINAL	PHOS. BRONZE H05K91R1 T0.20	GOLD/TIN PLATED	5	Gold/30u"/Ni50u"/Minimum/Tin120~200u"
4	FRONT SHELL	PHOS. BRONZE 1/2H05K91R0 T0.4	NICKEL PLATED	1	Ni: 80~120u"
5	TOP SHELL	BRASS H02680R T0.3	NICKEL PLATED	1	Ni: 80~120u"
6	BOTTOM SHELL	BRASS H02680R T0.3	NICKEL PLATED	1	Ni: 80~120u"