


— 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD. —

REV	ZONE	REVISION	DATE

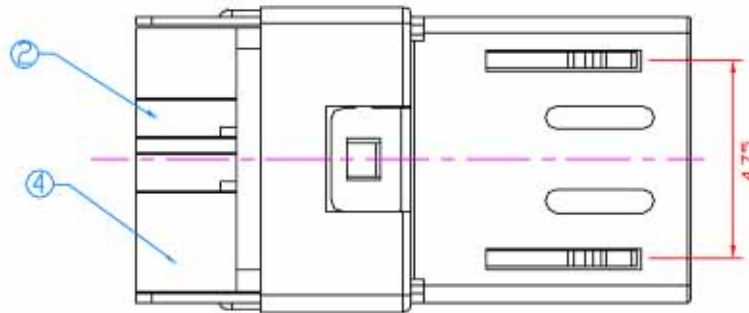

Specification:

*Contact Resistance:

- (1) 30m Ohm Max. at 100mA
- (2) 10,000 Cycles After: 40m Ohm Max. at 100mA

*Rated Voltage: AC 30V

*Contact Current Rating:

- (1) Signal Line: 1A/Pin (No. 1 to 5)
- (2) 2-Line For Power: 1.8A/Pin (No. 1 and 5), 0.5A/Pin (No. 2 to 4)

*Insulation Resistance: 100M Ohm Min. At 500V DC

*Dielectric Withstanding Voltage: 100V AC for 1 Minute



*Durability (Life Test): 10,000 Cycles

*Insertion Force: 35 Newton Maximum

*Extraction Force: 8 Newton Minimum

*Operating Temperature: -30 ° to +80 °C

*Solderability: 260 °C +/- 5 °C; 5 Sec

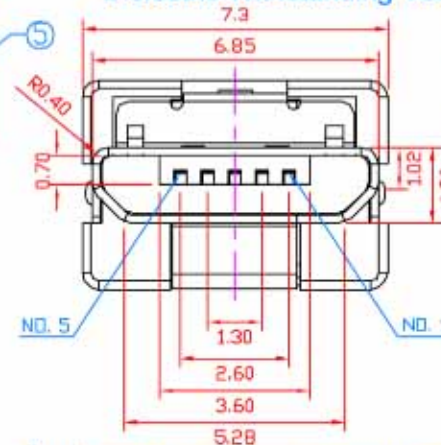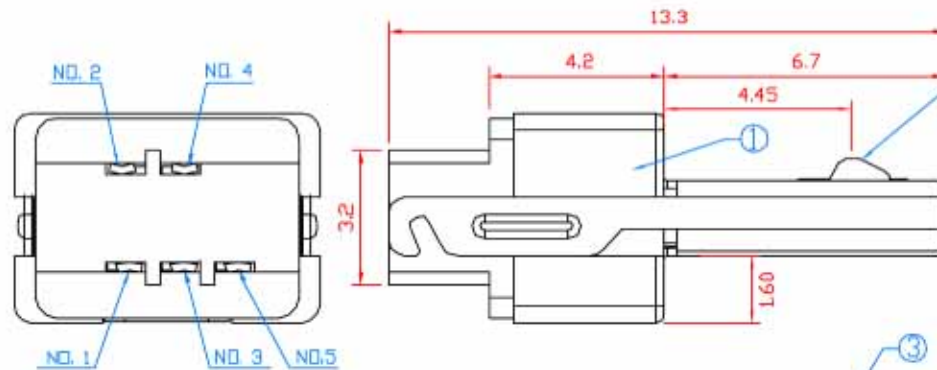

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	LCP+GF30%	BLACK	1	
2	PIN TERM.	PBS T:0.20	GOLD/TIN PLATED	5	Ni:80~120u", Gold:30u" Tin:120~200u"
3	SHELL	STAINLESS T:0.20	NICKEL PLATED	1	Ni:80~120u"
4	COVER	LCP+GF30%	BLACK	1	Ni:50u" MINIMUM.
5	SPRING	STAINLESS T:0.40		1	