


REV	ZONE	REVISION	DATE


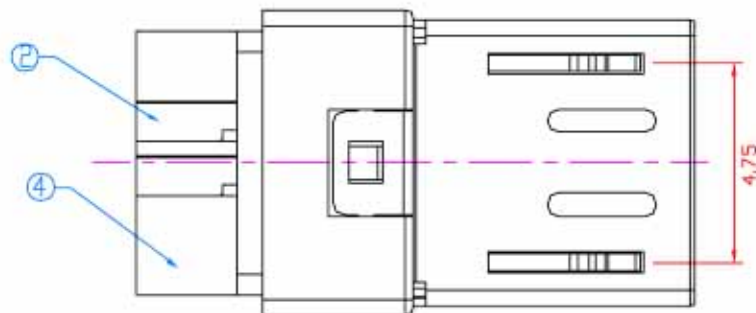


(1)30m Ohm Max. at 100mA

(2)10,000 Cycles After: 40m Ohm Max.at 100mA

(1)Signal Line: 1A/Pin (No. 1 to 5)

(2)2-Line For Power: 1.8A/Pin(No. 1 and 5),0.5A/Pin(No. 2 to 4)

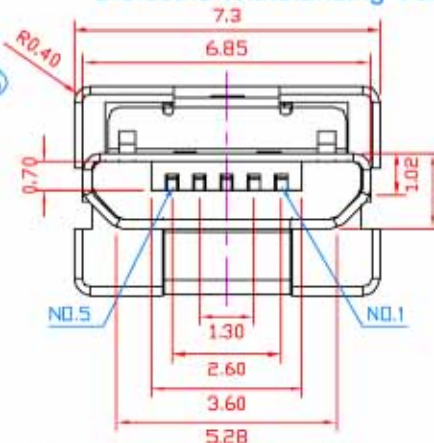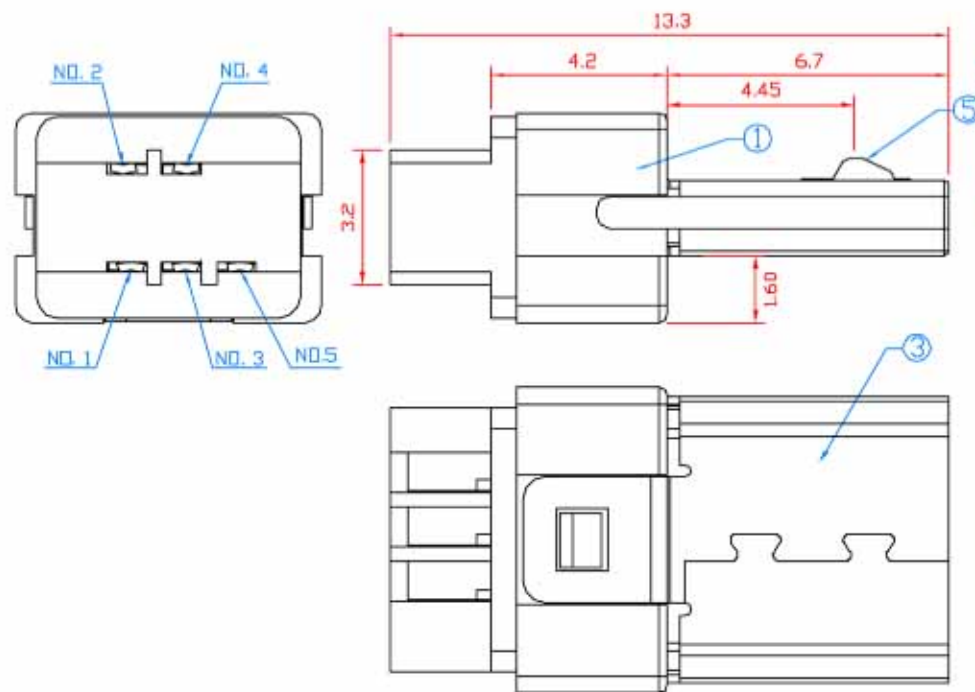

*Durability (Life Test): 10 ,000 Cycles

*Insertion Force: 35 Newton Maximum

*Extraction Force: 8 Newton Minimum

*Operating Temperature: -30 ° to +80 °C

*Solderability: 260 °C +/-5 °C;5 Sec

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	LCP+GF30%	BLACK	1	
2	PIN TERM.	PBS T±0.20	GOLD/TIN PLATED	5	NH80-120u" Gold/30u" Tin/120~200u"
3	SHELL	STAINLESS T±0.20	NICKEL PLATED	1	NI:50u" MINIMUM.
4	COVER	LCP+GF30%	BLACK	1	
5	SPRING	STAINLESS T±0.40		1	