

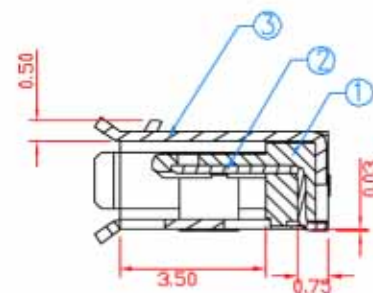
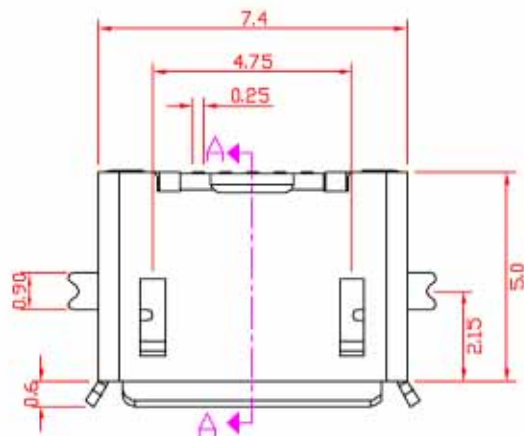



— 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD. —

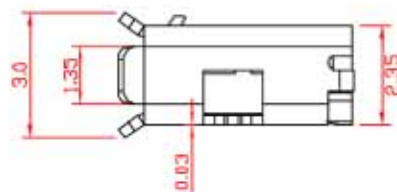

SECTION A-A

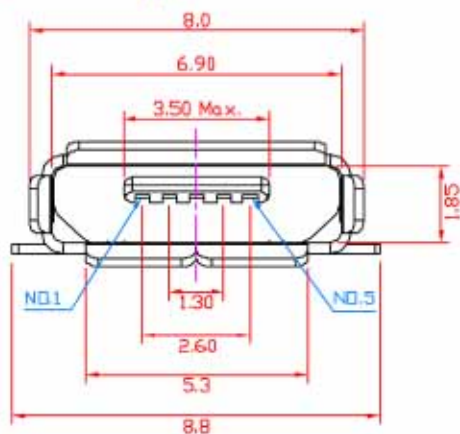

REV	ZONE	REVISION	DATE

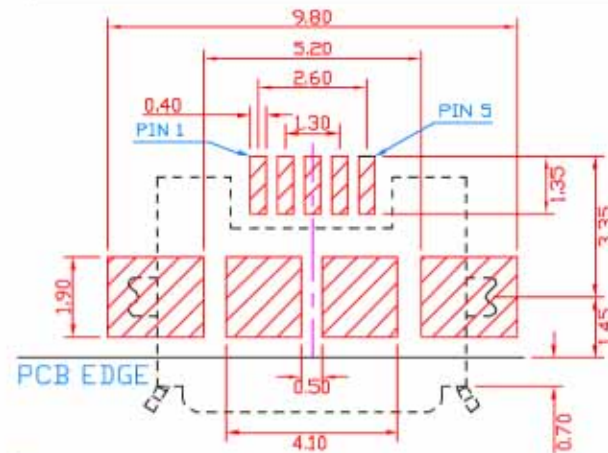

Specification:

COMPONENT SIDE
PCB LAYOUT

*Contact Resistance:

(1)30m Ohm Max. at 100mA

(2)10,000 Cycles After: 40m Ohm Max.at 100mA

*Rated Voltage: AC 30V

*Contact Current Rating:

(1)Signal Line: 1A/Pin (No. 1 to 5)

(2)2-Line For Power: 1.8A/Pin(No. 1 and 5),0.5A/Pin(No. 2 to 4)

*Insulation Resistance: 100M Ohm Min. At 500V DC

*Dielectric Withstanding Voltage: 100V AC for 1 Minute

*Durability (Life Test): 10 ,000 Cycles

*Insertion Force: 35 Newton Maximum

*Extraction Force: 8 Newton Minimum.

*Operating Temperature: -30 ° to +80 °C

*Solderability: 260 °C +/-5 °C;5 Sec

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	LCP+GF 30%	BLACK	1	
2	PIN TERM.	PHOSPHOR BRONZE T0.20	GOLD PLATED	5	Contact: Gold 30u" Other Area: Gold 1u"
3	SHELL	STAINLESS T0.25	NICKEL PLATED	1	NI-50u" MINIMUM.