
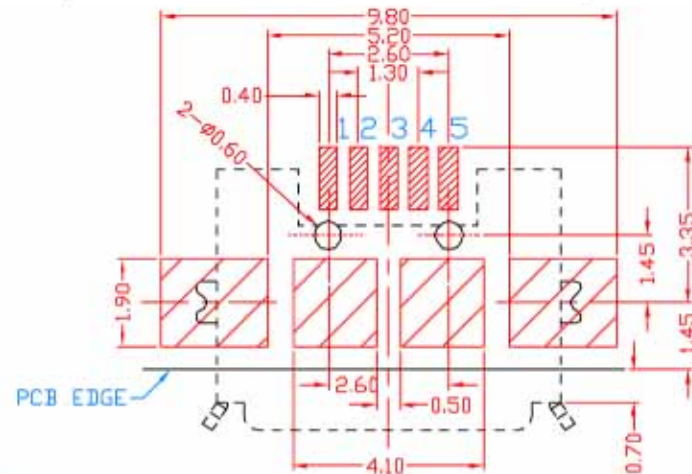
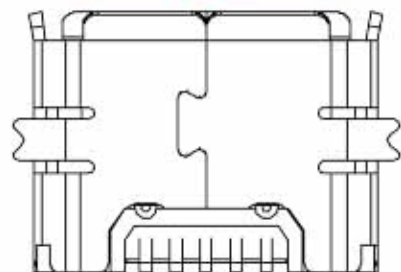
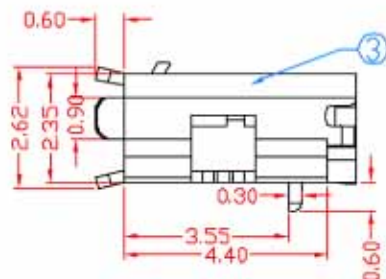
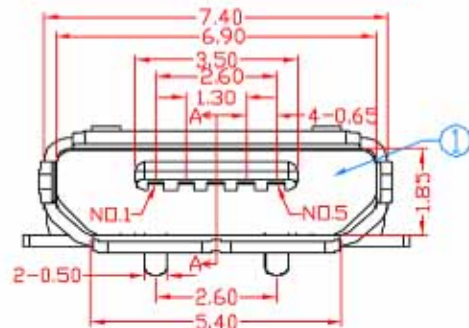
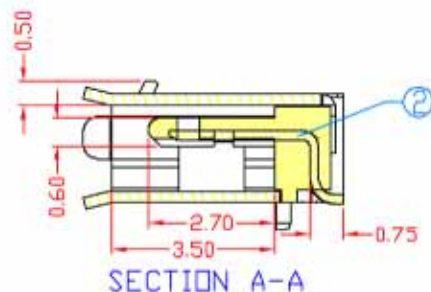


# — 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD. —

| NO | NAME      | MATERIAL                  | FINISH              | Q'TY | REMARK                                    |
|----|-----------|---------------------------|---------------------|------|-------------------------------------------|
| 1  | HOUSING   | LCP+GF30%                 | BLACK               | 1    |                                           |
| 2  | PIN TERM. | PHOSPHOR BRONZE 10-0.25mm | GOLD PLATED         | 5    | Contact : Gold 30μ<br>Other Area: Gold 1μ |
| 3  | SHELL     | STAINLESS 1-0.25          | TIN PLATED/MATTE Sn | 1    | TIN: 120~200μ                             |

| REV | ZONE | REVISION | DATE |
|-----|------|----------|------|
|     |      |          |      |
|     |      |          |      |

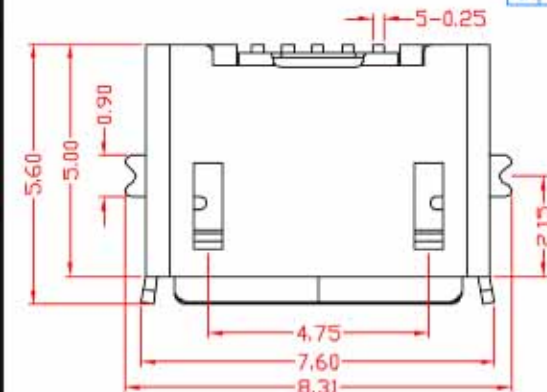

## Specification:

### \*Contact Resistance:

(1)30m Ohm Max. at 100mA

(2)10,000 Cycles After: 40m Ohm Max.at 100mA

### \*Rated Voltage: AC 30V

### \*Contact Current Rating:

(1)Signal Line: 1A/Pin (No. 1 to 5)

(2)2-Line For Power: 1.8A/Pin(No. 1 and 5),0.5A/Pin(No. 2 to 4)

\*Insulation Resistance: 100M Ohm Min. At 500V DC

\*Dielectric Withstanding Voltage: 100V AC for 1 Minute

\*Durability (Life Test): 10 ,000 Cycles Front

\*Insertion Force: 35 Newton Maximum

\*Extraction Force: 8 Newton Minimum.

\*Operating Temperature: -30 °C± +80°C

\*Solderability: 255 °C±5°C;5 Sec