

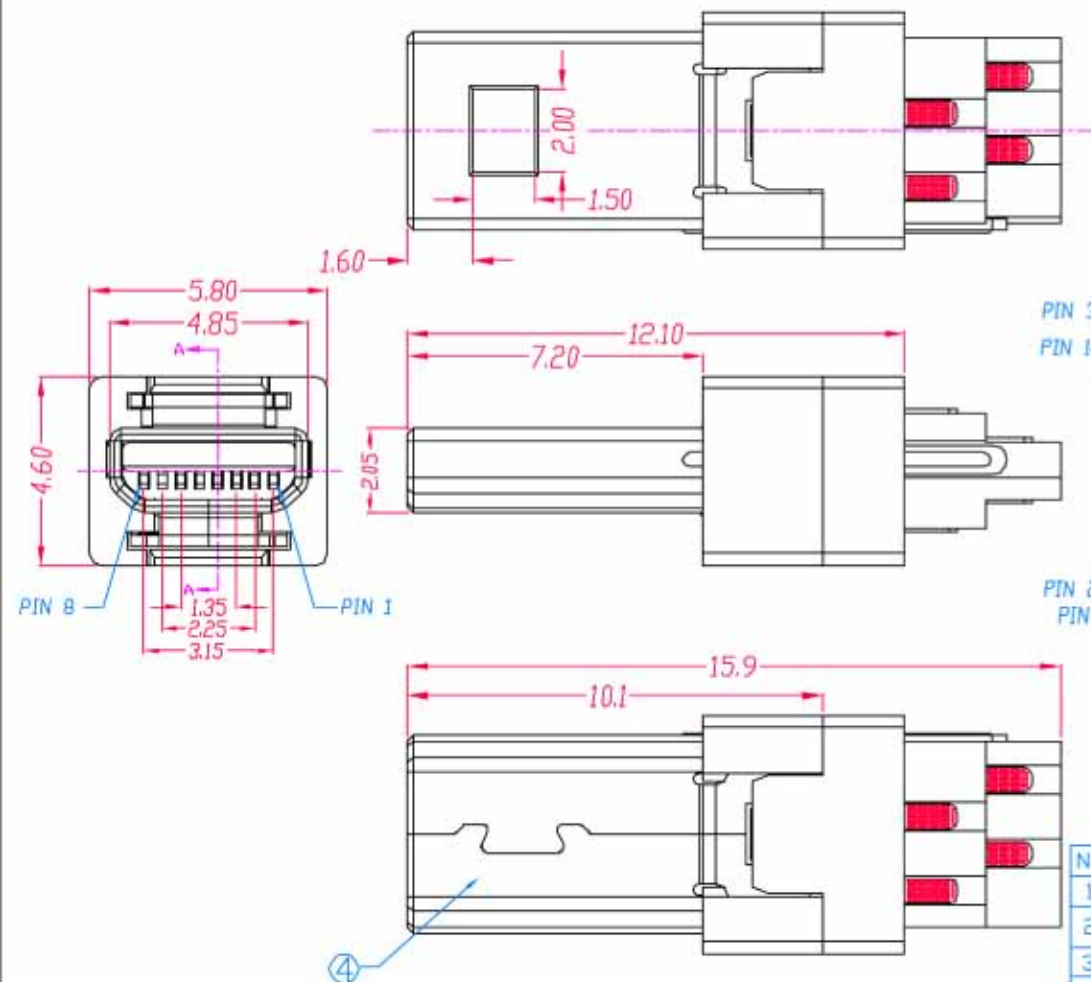


REV	ZONE	REVISION	DATE

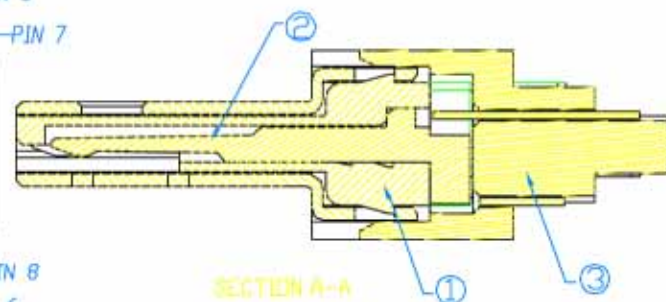

Specification:
Contact Resistance: 50m Ohm . Max.
Insulation Resistance: 100M Ohm Min. At 500VDC.
Rated Voltage And Current: 1A At 30VAC Minimum.
Dielectric Withstanding Voltage: 100V AC for 1 Minute
Durability (Life Test): 3000 Cycles
Insertion Force: 35 Newton Maximum.
Extraction Force: 4 Newton Minimum.

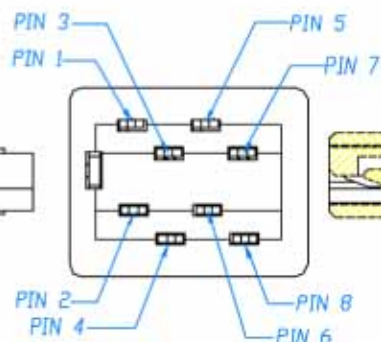

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	LCP+ G.F.30%	BLACK	1	
2	PIN TERM.	PHOS.BRONZE T0.2	TIN/GOLD PLATED	8	Gold15u" Ni80-120u",Tin120-200u"
3	COVER	LCP+ G.F.30%	BLACK	1	
4	SHELL	BRASS T0.3	NICKEL PLATED	1	Ni50u" MINIMUM