

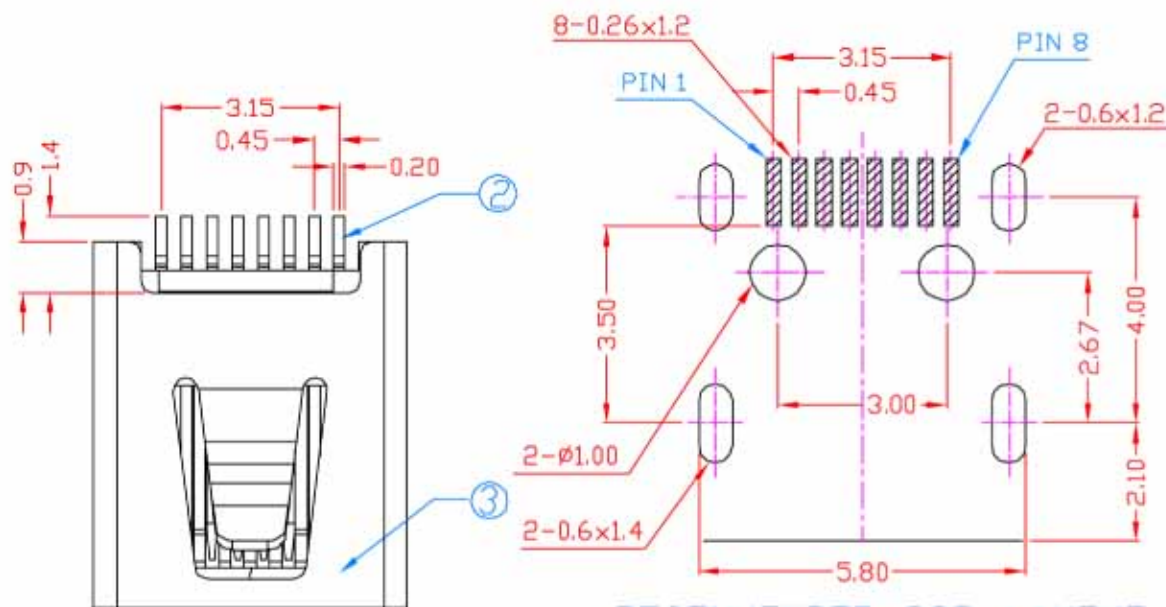


毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD.

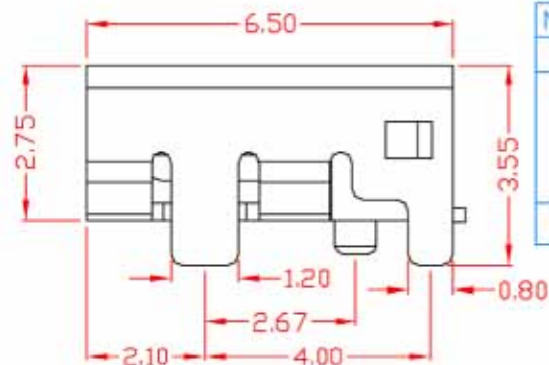

RECOMMENDED PCB LAYOUT

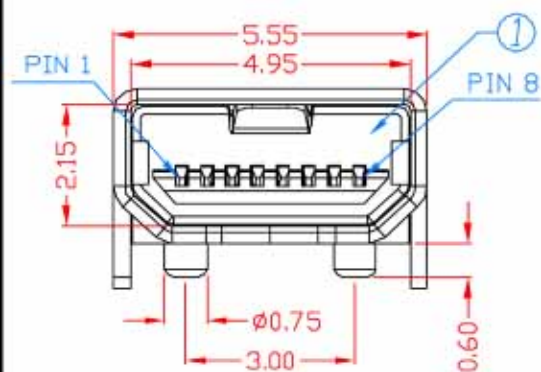

REV	ZONE	REVISION	DATE

Specification:

Contact Resistance: 50m Ohm. Max.

Insulation Resistance: 100M Ohm Min. At 500VDC.

Rated Voltage And Current: 1A At 30VAC Minimum.

Dielectric Withstanding Voltage: 100V AC for 1 Minute

Insertion Force: 35 Newton Maximum.

Extraction Force: 3 Newton Minimum.

Durability (Life Test): 3000 Cycles

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	LCP+ G.F.30%	BLACK	1	
2	PIN TERM.	PBS T:0.2	GOLD PLATED	8	Contact : Gold 15u" Other Area: Gold 1u"
3	SHELL	BRASS T:0.3	GOLD PLATED	1	Gold 1u"