


— 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD. —

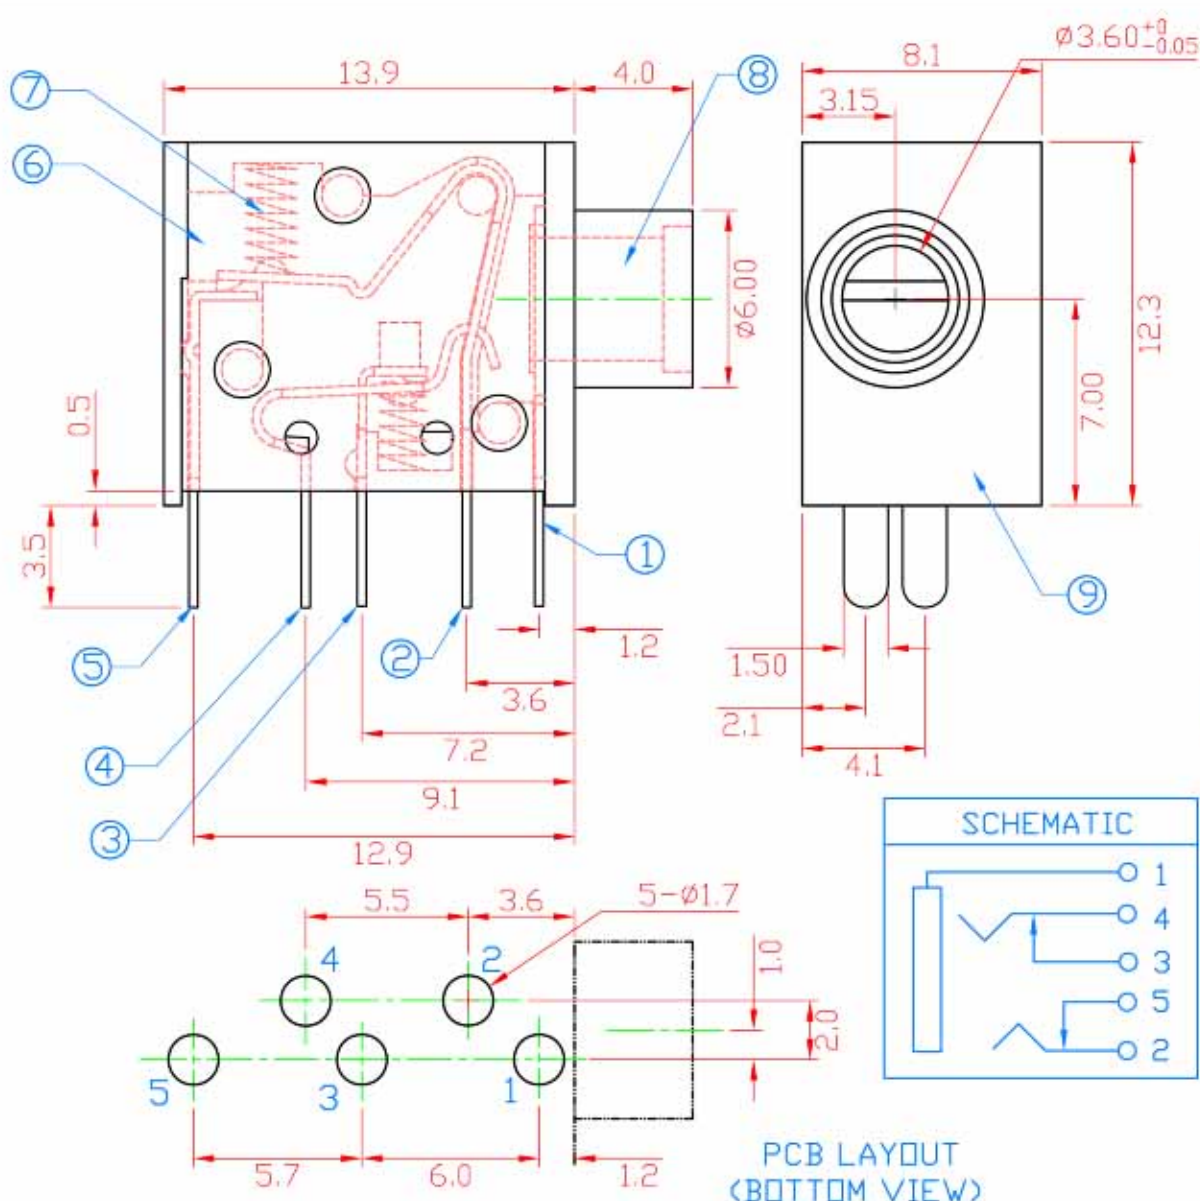

REV	ZONE	REVISION	DATE

NO.	NAME	MATERIAL	FINISH	Q'TY
1	EARTH TERMINAL	BRASS t=0.3	TIN PLATED	1
2	TIP SPRING	PHOSPHOR BRONZE t=0.3	TIN PLATED	1
3	TIP SHUNT	BRASS t=0.3	TIN PLATED	1
4	RING SPRING	PBS t=0.3	TIN PLATED	1
5	RING SHUNT	BRASS t=0.3	TIN PLATED	1
6	COVER	PBT G.F.	SEE COLOR	1
7	SPRING	STAINLESS STEEL	NICKEL PLATED	2
8	BUSHING	BRASS	NICKEL PLATED	1
9	HOUSING	PBT G.F.	SEE COLOR	1

MODEL NO.	PJ-0004P _ -5B-L (PC99 COLOR)					
	A	B	C	D	E	F
HOUSING & COVER COLOR	PINK	BLACK	LIME	YELLOW	ORANGE	LIGHT BLUE
PANTONE	701C		577C	123C	157C	284C

Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max.1KHz.

Insulation Resistance: 100M Ohm Min. At 500V DC.

Rated Voltage And Current: DC 12V,2A Max ; AC 100V,1A Max.

Dielectric Withstanding Voltage: 500V AC For 1 Minute.

Durability (Life Test):

A: For Phosphor Bronze 1500 Cycles Minimum.

B: For PBS 2000 Cycles Minimum.

Insertion Force: 0.3~3.0 Kg.

Extraction Force: 0.3~3.0Kg.