


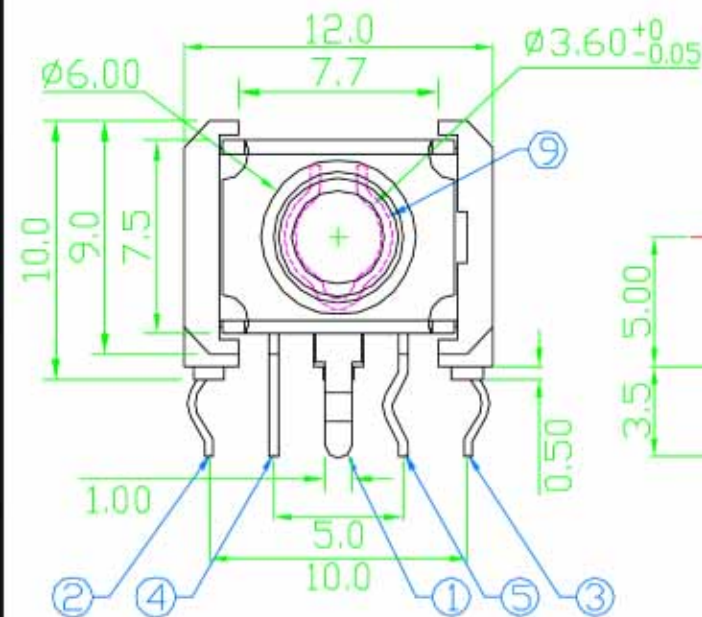


— 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD. —

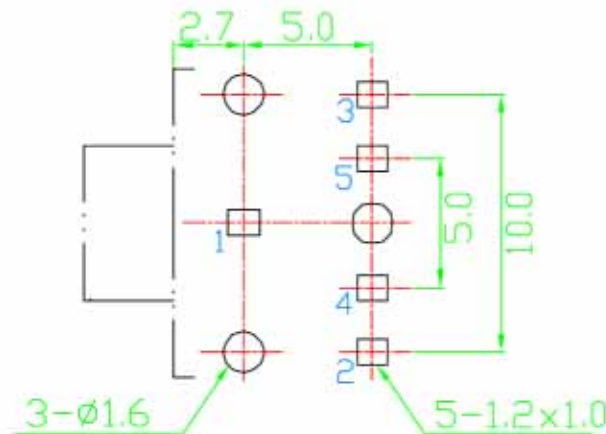

Green
Product

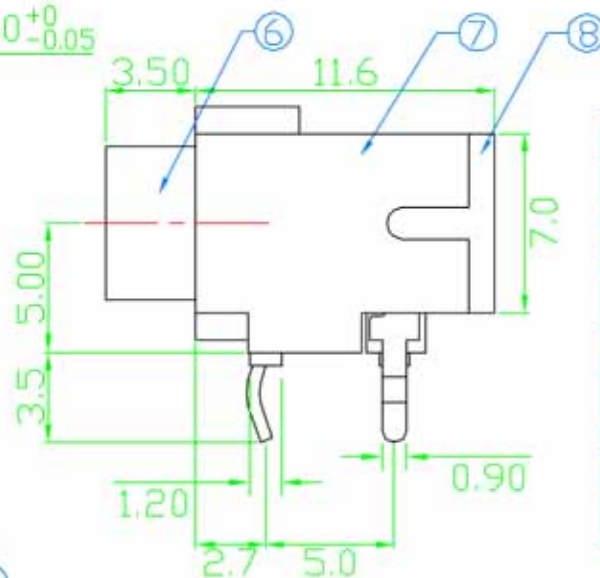

PCB LAYOUT
(BOTTOM VIEW)

REV	ZONE	REVISION	DATE

NO.	NAME	MATERIAL	FINISH	Q'TY
1	GROUND TERM.	C.R.S. T:0.5	TIN PLATED	1
2	RING SPRING	PBS T:0.3	TIN PLATED	1
3	TIP SPRING	PBS T:0.3	TIN PLATED	1
4	RING BREAK	BRASS T:0.4	TIN PLATED	1
5	TIP BREAK	BRASS T:0.4	TIN PLATED	1
6	BUSHING	BRASS	NICKEL PLATED	1
7	HOUSING	PBT G.F.	BLACK	1
8	BACK COVER	PBT G.F.	BLACK	1
9	SPRING WIRE	BRASS	SILVER PLATED	1

Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max.1KHz

Insulation Resistance: 100M Ohm Min. At 500V DC.

Rated Voltage And Current: DC 12V,2A Max ; AC 100V,1A Max.

Dielectric Withstanding Voltage: 500V AC For 1 Minute.

Durability (Life Test):

A: For Phosphor Bronze 1500 Cycles Minimum.

B: For PBS 2000 Cycles Minimum.

Insertion Force: 0.3-3.0 Kg.

Extraction Force: 0.3-3.0Kg.