


— 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD. —

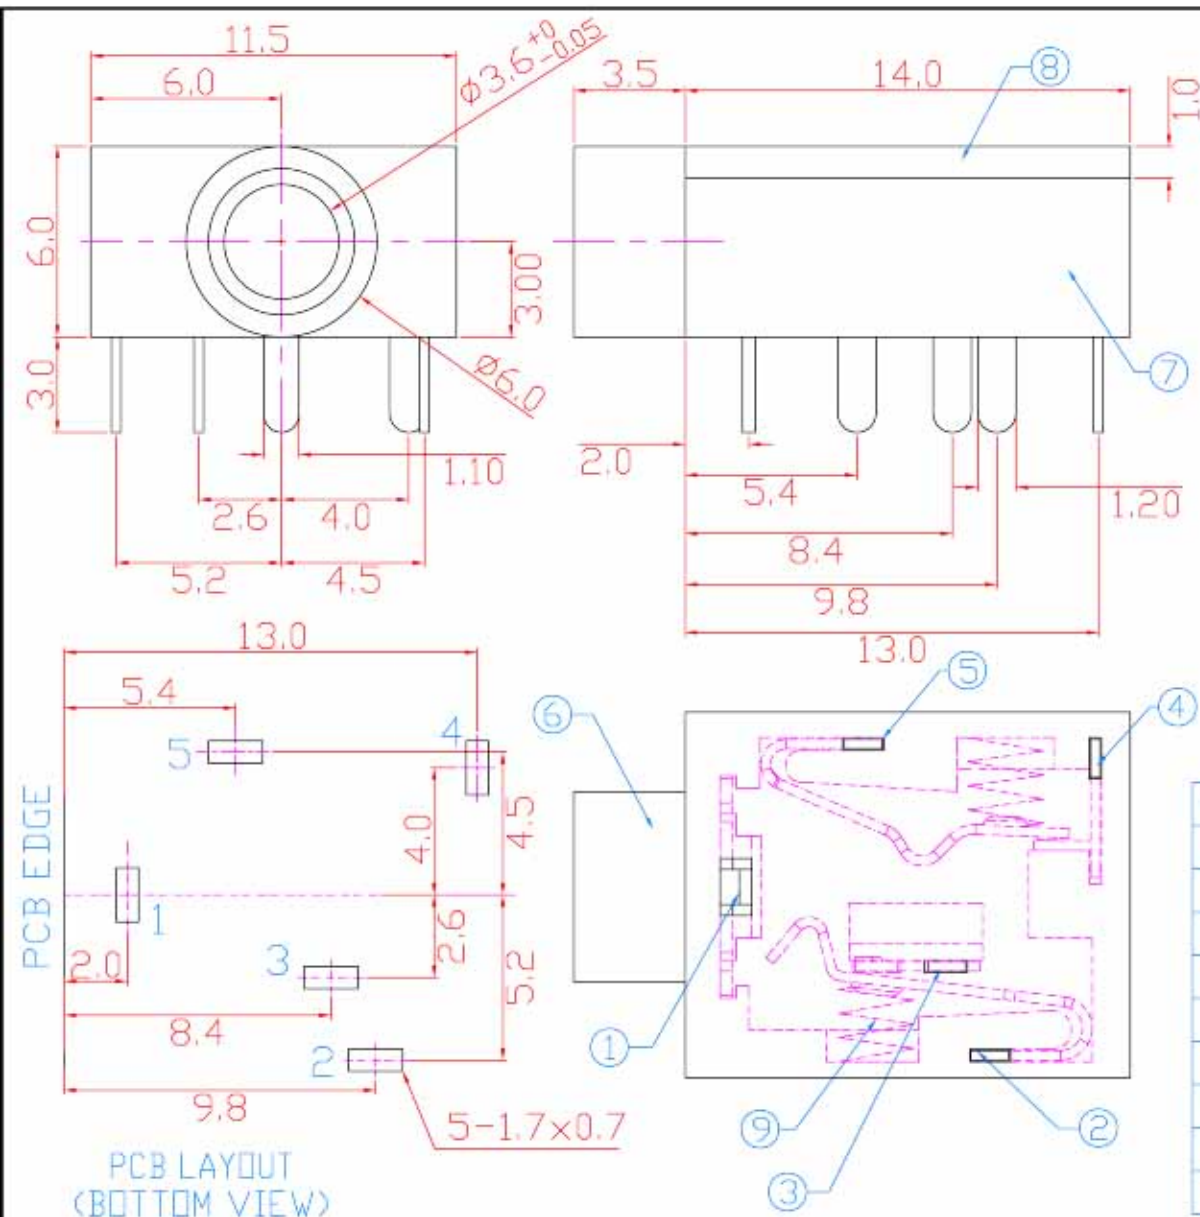

REV	ZONE	REVISION	DATE

Specification:

Contact Resistance: 30m Ohm, Max At AC 100mA Max.1KHz.

Insulation Resistance: 100M Ohm Min. At 500V DC.


Rated Voltage And Current: DC 12V,2A Max ; AC 100V,1A Max.

Dielectric Withstanding Voltage: 500V AC For 1 Minute.

Durability (Life Test): A: For Phosphor Bronze 1500 Cycles Minimun.

Insertion Force: 0.3~3.0 Kg.

Extraction Force: 0.3~3.0Kg.



NO.	NAME	MATERIAL	FINISH	Q'TY
1	EARTH TERMINAL	BRASS t=0.4	TIN PLATED	1
2	RING SPRING	PHOSPHOR BRONZE t=0.3	TIN PLATED	1
3	RING SHUNT	BRASS t=0.3	TIN PLATED	1
4	RING SHUNT	BRASS t=0.3	TIN PLATED	1
5	TIP SPRING	PHOSPHOR BRONZE t=0.3	TIN PLATED	1
6	BUSHING	BRASS	NICKEL PLATED	1
7	HOUSING	PBT G.F.	BLACK	1
8	COVER	P.C	TRANSPARENT	1
9	SPRING	STAINLESS STEEL	NATURE	2