


— 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD. —

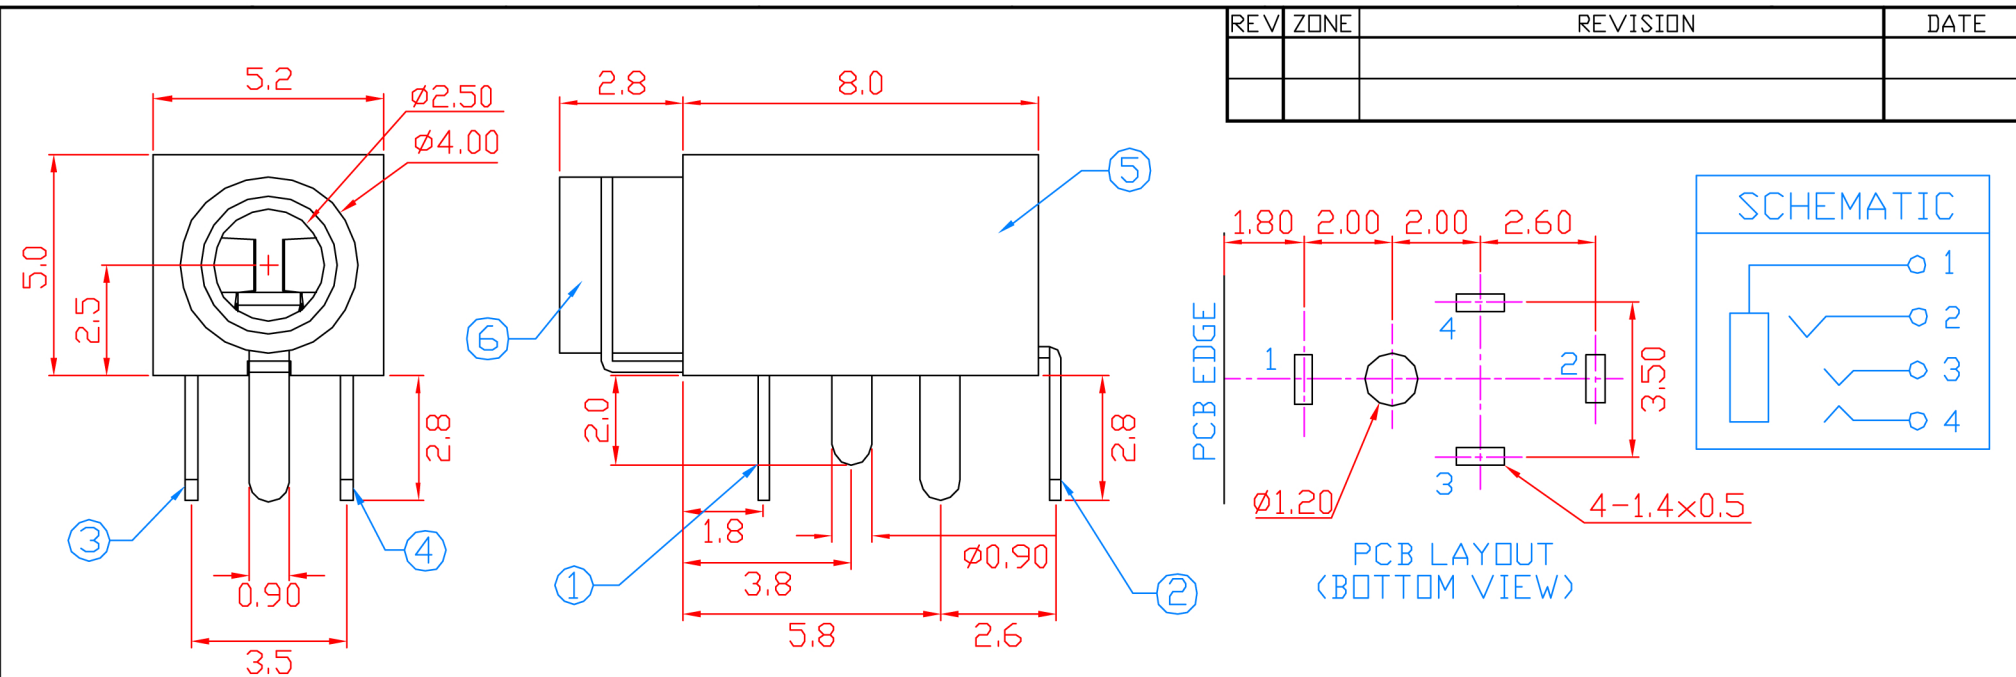

NO.	NAME	MATERIAL	FINISH	Q'TY
1	GROUND TERM.	BRASS T:0.25	TIN PLATED	1
2	SPRING TERM.	PHOS. BRONZE T:0.25	TIN PLATED	1
3	SPRING CONTACT	PHOS. BRONZE T:0.3	TIN PLATED	1
4	SPRING CONTACT	PHOS. BRONZE T:0.3	TIN PLATED	1
5	HOUSING	PBT G.F.	BLACK	1
6	BUSHING	BRASS	NICKEL PLATED	1

Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max.1KHz

Insulation Resistance: 100M Ohm Min. At 500V DC.

Rated Voltage And Current: DC 12V,2A Max ; AC 100V,1A Max.

Dielectric Withstanding Voltage: 500V AC For 1 Minute.

Durability (Life Test):

A: For Phosphor Bronze 1500 Cycles Minimum.

B: For PBS 2000 Cycles Minimum.

Insertion Force: 0.3~3.0 Kg.

Extraction Force: 0.3~3.0Kg.