



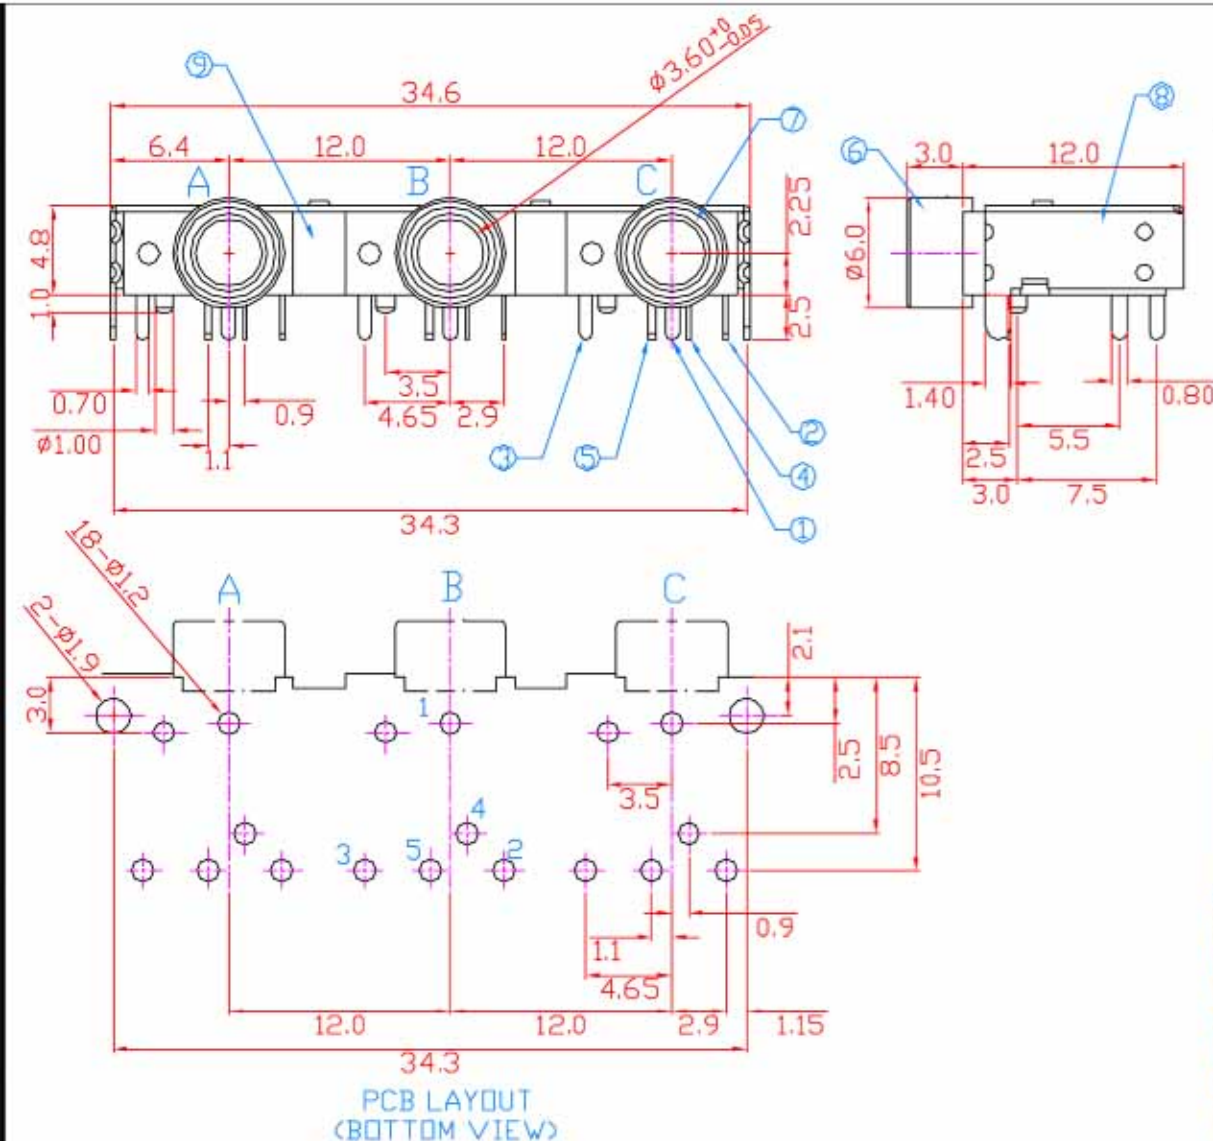

REV	ZONE	REVISION	DATE

NO.	NAME	MATERIAL	FINISH	Q'TY
1	GROUND TERM.	BRASS 0.20	TIN PLATED	3
2	TIP SPRING	PBS 0.25	TIN PLATED	3
3	RING SPRING	PBS 0.50	TIN PLATED	3
4	TIP BREAK	BRASS 0.20	TIN PLATED	3
5	RING BREAK	BRASS 0.40	TIN PLATED	3
6	HOUSING	NYLON PA9T G.F	SEE COLOR	3
7	BUSHING	BRASS	NICKEL PLATED	3
8	SHELL	SPCC 0.30	NICKEL PLATED	1
9	HOLDER	PBT G.F	BLACK	1

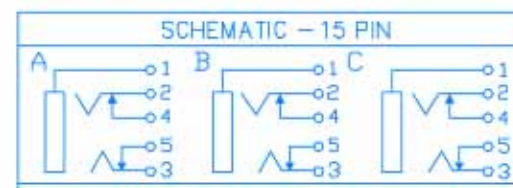

MODEL NO.	PJ-2002-15-L	PJ-2002P-15-L (PC99 Color)
HOUSING COLOR	ALL BLACK	PINK LIGHT BLUE LIME
PANTONE		701C 284C 577C

Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max.1KHz.
 Insulation Resistance: 100M Ohm Min. At 500V DC.
 Rated Voltage And Current: DC 12V,2A Max ; AC 100V,1A Max.
 Dielectric Withstanding Voltage: 500V AC For 1 Minute.
 Durability (Life Test): For PBS 2000 Cycles Minimum.
 Insertion Force: 0.3~3.0 Kg.
 Extraction Force: 0.3~3.0Kg.