

REV	ZONE	REVISION	DATE

RCA Jack Specification:

Contact Resistance: 30m Ohm Max. At AC 100mA Max.1KHz.

Insulation Resistance: 100M Ohm Min. At 500V DC.

Rated Voltage And Current: DC 12V,2A Max.

Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute.

Durability (Life Test): 4000 Cycles.

Insertion Force: 0.3~3.0 Kg.

Extraction Force: 0.3~3.0 Kg.

Mini Din Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 100M Ohm Min.AT 500V DC


Rated Voltage And Current: DC12V,2A Max;AC 100V.1A Max.

Dielectric Withstanding Voltage: 250V AC For 1 Minute.

Durability (Life Test): 100 Cycles.

Insertion Force: 4.0KG Maximum.

Extraction Force: 0.9KG Minimum.

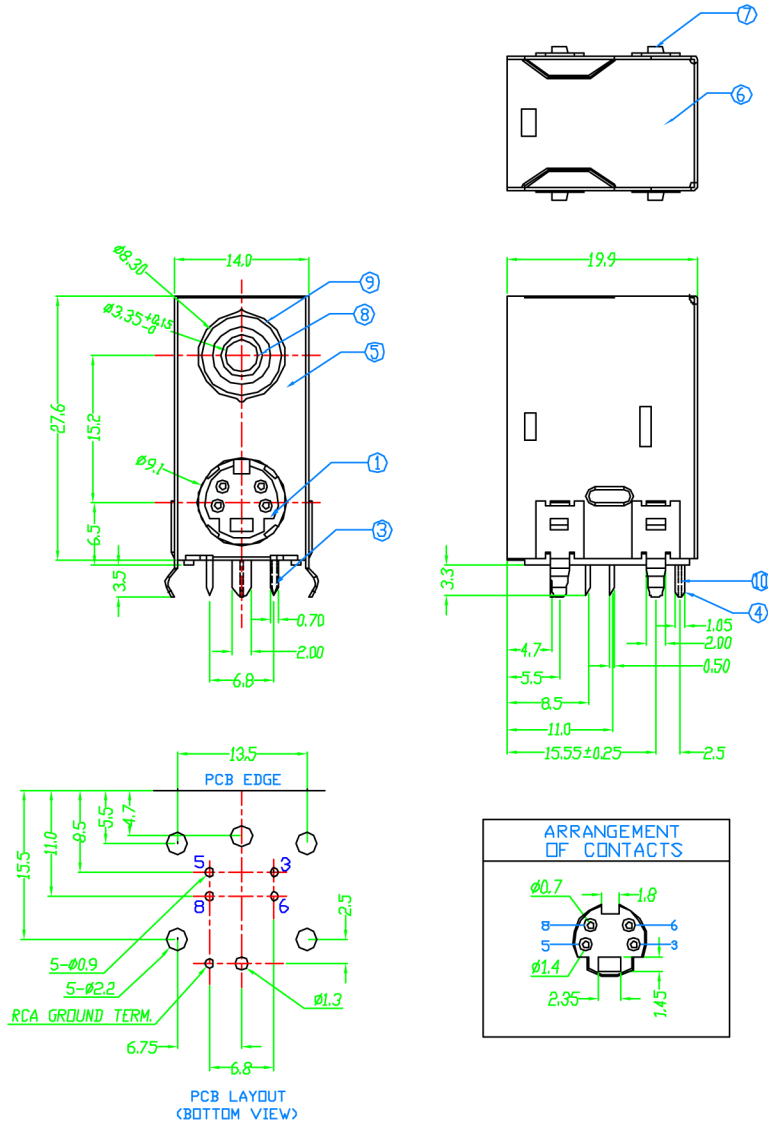

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	BOTTOM COVER	PBT G.F.	BLACK	1	
3	MINI DIN TERM.	PHOS. BRONZE T=0.2	TIN/GOLD PLATED	4	Gold1~3u", NI:40~60u" , TIN:120u" <100% pure Tin of lead free plating>
4	RCA TERM.	BRASS T=0.4	TIN PLATED	1	TIN:120~200u"
5	FRONT SHIELD	BRASS T=0.3	NICKEL PLATED	1	NI:80~120u"
6	BACK SHIELD	BRASS T=0.3	NICKEL PLATED	1	NI:80~120u"
7	TAB	BRASS T=0.3	TIN PLATED	4	TIN:120~200u"
8	INSERT RING	PBT G.F.	YELLOW	1	
9	RCA BARREL	BRASS	NICKEL PLATED	1	NI:80~120u"
10	RCA GROUND TERM.	BRASS T=0.3	TIN PLATED	1	TIN:120~200u"