




(NON-SHORTING)
SCHEMATIC

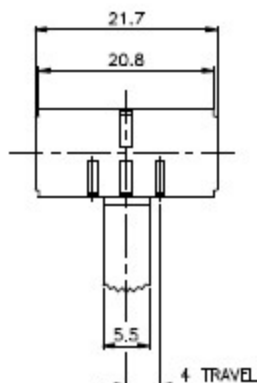

REMARK:

X=

Clip Assembled Should Be located on the Side of Knob Handle.

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 1P3T		
	RATING: AC 125V 3A	MODEL NO: WK-13H09-G		
	CONTACT RESISTANCE: MAX. 30mΩ			
	INSULATION RESISTANCE: 500MΩ AT 500V DC	UNIT: mm	DWN	
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN	SCALE: 2 : 1	CHKD	
	OPERATION FORCE: 180 ± 80 gm	TOLERANCE: ±0.20	APPD.	
	SWITCHING LIFE: 10,000 Cycles(6-10a/m loading)			
By:	銳永企業有限公司 E-YUNG ENTERPRISE CO., LTD.			DRWG NO:
DATE:				980641-02

The material contained in this drawing is the property of PIC. Any use other than that specifically authorized by PIC is prohibited. The above drawing is subjected to change for improvement without prior notice.

ENG-F-51