



NON-SHORTING
SCHEMATIC

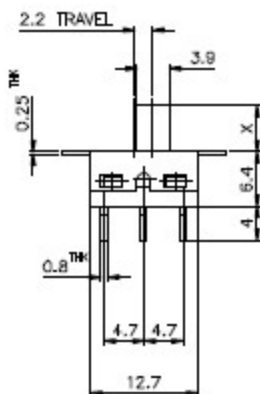

X=

ISSUED	SPECIFICATION (INITIAL)		TITLE: SLIDE SWITCH 1P2T	
	RATING:	AC 250V 1A	MODEL NO: WS-12D01-G	
	CONTACT RESISTANCE:	Not more than 30mΩ		
	INSULATION RESISTANCE:	500MΩ at 500V DC	UNIT: m m	DWN
	WITHSTAND VOLTAGE:	AC 1000V for 1 min	SCALE: 2 : 1	CHK'D
	OPERATION FORCE:	250±100g	TOLERANCE: ±0.2	APPD.
	SWITCHING LIFE:	10,000 cycles(8-10c/m loading)		
Br:	銳永企業有限公司 E-YUNG ENTERPRISE CO., LTD.			DRWS NO:
DATE:				880329-00

The material contained in this drawing is the property of PIC. Any use other than that specifically authorized by PIC is prohibited. The above drawing is subjected to change for improvement without prior notice.

ENG-F-51